

Stainless Steel Every Time

PRODUCT CATALOG




(Page Intentionally Left Blank)



PRODUCT CATALOG - TABLE OF CONTENTS

OUTDOOR DRINKING FOUNTAINS	WSF1-1
• OUTDOOR BOTTLE FILLERS	WSF2-1
• <u>OUTDOOR SHOWERS</u>	WSF3-1
• WATERLESS TOILETS	WSF4-1
• WATERLESS URNIALS	WSF5-1
OUTDOOR HAND SANITIZER STATION	WSF6-1
OUTDOOR FRONT APPROACH DRINKING FOUNTAINS	WSF7-1
• OUTDOOR FRONT APPROACH BOTTLE FILLERS	WSF8-1

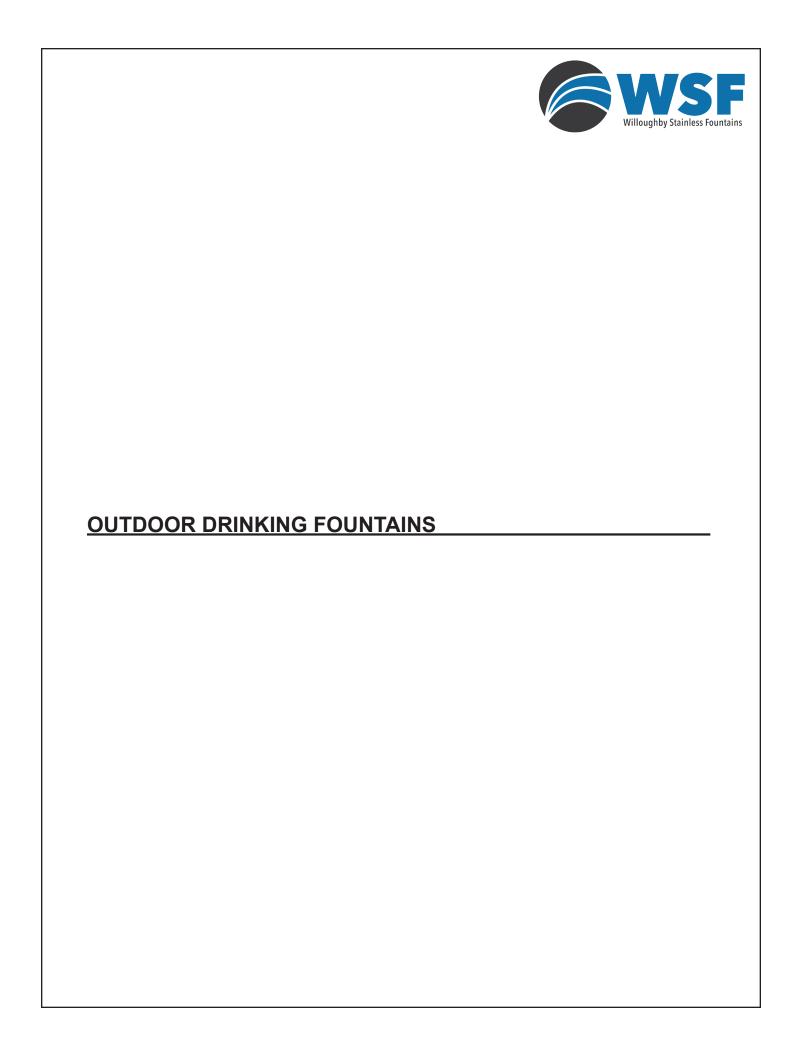


WODF-1 Series Outdoor Drinking Fountain






WODF-1



WODF-1-HC



WODF-1-PET



WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

Recommended Specifications

Willoughby Model **WODF-1** outdoor drinking fountain is a single-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have a high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by a pedestal-mounted solid stainless steel push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WODF-1** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9 requirements.

Fountain is available in an ADA configuration that shall meet American Disabilities Act of 2010 (ADA) compliance requirements; see option (HC) on the following page.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push button
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-1 outdoor drinking fountain in Silver color Use the following Willoughby Model Number: **WODF-1-SL**

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


MADE IN THE **U.S.A**.

© Rev. 9/2024

1.) Outdoor Drin	king Fountain Type:	3.) Colors	s (select one):
■ WODF-1	Single-bowl Outdoor Drinking Fountain	☐ SL	Silver
		🔲 G	Green
2.) Options:		☐ R	Red
☐ HC	Adult ADA Compliant Single-bowl Fountain	□ BL	Blue
□ PET	Pet Single-bowl Fountain		Orange
316-1	316 Stainless Steel Body, Single		Violet
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	☐ Y	Yellow
CAR-10-2	Surface Carrier, Double , Used With Pet Bowl Only	BR	Brown
	(Including mounting hardware)	□ BK	Black
■ SOV	Shut Off Valve	TBK	Black (Textured)
☐ SCV	Seasonal Bowl Cover (1)	□ BE	Beige
☐ JF/FW	Jug Filler / Foot Wash	□ W	White
☐ HBE	Hose Bibb Exposed	YG	Yellow Green
☐ HBLD	Recessed Hose Bibb w/ Lock Door	LBL	Light Blue
□ HH	Hose / Leash Hanger	GT	Graphite (Textured)
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)	■ MTW	Matte White
■ WSFMK6	6 Bolt Hole Mounting Kit, Used With Pet Bowl Only		
	(Not req'd with Carrier option)		
Approved For M	Manufacturing By:	Date:	Company:
Typhroved Lot II	wandlacturing by	Date	Oompany

Wall Thickness: Wall Type:

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

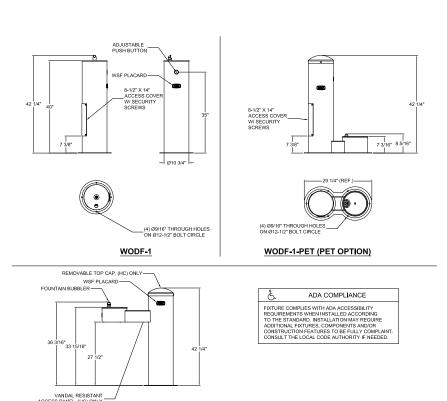


WODF-1-HC (ADA OPTION)



WODF-2 Series Outdoor Drinking Fountain









Recommended Specifications

Willoughby Model WODF-2 outdoor drinking fountain is a dual-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. WODF-2 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.


Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-2 outdoor drinking fountain with Child-height (JR. ADA) bowl, in Green color

Use the following Willoughby Model Number: WODF-2-CHD-G





WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov


MADE IN THE U.S.A.


visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Drink	ing Fountain Type:	4.) Colors	s (select one):	
☐ WODF-2	Two-bowl Outdoor Drinking Fountain	SL	Silver	
	•	G	Green	
2.) Bowl Height (c	ther than main column bowl):	☐ R	Red	
☐ HC	Adult ADA Compliant	☐ BL	Blue	
☐ CHD	Child (JR. ADA Compliant)		Orange	
□ PET	Pet		Violet	
		☐ Y	Yellow	
3.) Options:		BR	Brown	
316-2	316 Stainless Steel Body, Double	BK	Black	
CAR-10-1	Surface Carrier, Single (Including mounting hardware)	TBK	Black (Textured)	
CAR-10-2	Surface Carrier, Double , Used With Pet Bowl Only	BE	Beige	
	(Including mounting hardware)	□ W	White	
☐ SOV	Shut Off Valve	YG	Yellow Green	
☐ SCV	Seasonal Bowl Covers (2)	LBL	Light Blue	
☐ JF/FW	Jug Filler / Foot Wash	GT	Graphite (Textured)	
☐ HBE	Hose Bibb Exposed	■ MTW	Matte White	
☐ HBLD	Recessed Hose Bibb w/ Lock Door			
□ HH	Hose / Leash Hanger			
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)			
■ WSFMK6	6 Bolt Hole Mounting Kit , Used With Pet Bowl Only			
	(Not req'd with Carrier option)			
Approved For N	//anufacturing By:	Date:	Company:	
I .	: Wall Type:			







WODF-2-CHD

BUBBLER
PUSH BUTTONS


42 1/2" 40"


BUBBLER

7"

Ø10 3/4"

WODF-2-PET






WODF-2-HC & WODF-2-CHD

WODF-2-PET


FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.





WODF-3 Series Outdoor Drinking Fountain





WODF-3-HC-CHD


Recommended Specifications

Willoughby Model WODF-3 outdoor drinking fountain is a triple-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. WODF-3 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-3 outdoor drinking fountain with Adult ADA and Child-height (JR. ADA) bowls, in Red color

Use the following Willoughby Model Number: WODF-3-HC-CHD-R



WODF-3-CHD-PET (REAR PET LOCATION)

WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Drin	king Fountain Type:	4.) Colors	(select one):	
☐ WODF-3	Three-bowl Outdoor Drinking Fountain	☐ SL	Silver	
		☐ G	Green	
2.) Bowl Height (other than main column bowl, select two):	☐ R	Red	
☐ HC	Adult ADA Compliant	☐ BL	Blue	
CHD	Child (JR. ADA Compliant)	<u> </u>	Orange	
☐ PET	Pet Bowl	□ v	Violet	
	☐ Side ☐ Rear	_ Y	Yellow	
		☐ BR	Brown	
3.) Options:		□ вк	Black	
316-3	316 Stainless Steel Body, Triple	□ твк	Black (Textured)	
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	☐ BE	Beige	
☐ CAR-10-2	Surface Carrier, Double, Used With Pet Bowl Only	□ W	White	
_	(Including mounting hardware)	☐ YG	Yellow Green	
☐ SOV	Shut Off Valve	LBL	Light Blue	
SCV	Seasonal Bowl Covers (3)	☐ GT	Graphite (Textured)	
☐ JF/FW	Jug Filler / Foot Wash	☐ MTW	Matte White	
☐ HBE	Hose Bibb Exposed	_		
HBLD	Recessed Hose Bibb W/Lock Door			
□ нн	Hose / Leash Hanger			
☐ WSFMK4	4 Bolt Hole Mounting Kit (Not reg'd with Carrier option)			
☐ WSFMK6	6 Bolt Hole Mounting Kit , Used With Pet Bowl Only			
_	(Not reg'd with Carrier option)			
Approved For	Manufacturing By:	Date:	Company:	
Wall Thickness				



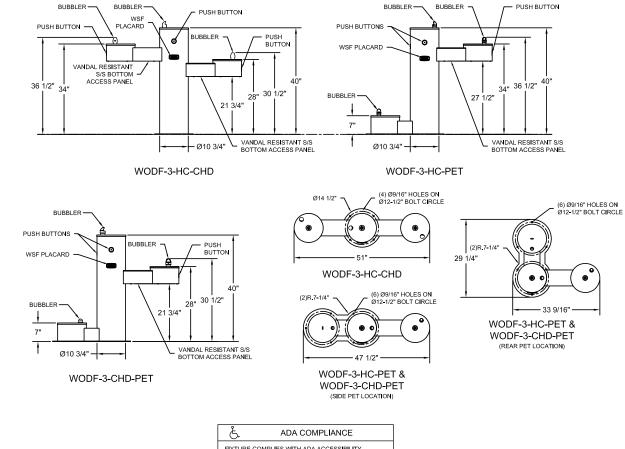

FIXTURE COMPLIES WITH ADA ACCESSIBILITY FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS ANDIOR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065




VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

WODF-1WM Series
Wall Mounted
Outdoor Drinking Fountain



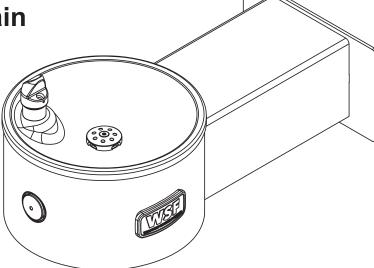

Recommended Specifications

Willoughby Model **WODF-1WM** wall mounted outdoor drinking fountain is a single-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by pedestal mounted solid stainless steel push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WODF-1WM** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1.

When the drinking fountain bowl is mounted at an appropriate height (34" max A.F.F. for Adult ADA, 31" max A.F.F. for JR. ADA), it shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Standard Features

- * Adult ADA or Child (JR.) ADA compliant
- * 5/32" wall thickness stainless steel wall column
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push button
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-1WM wall mounted outdoor drinking fountain in Blue color Use the following Willoughby Model Number: WODF-1WM-BL



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Drin	king Fountain Type:	3	.) Color	s (select one):
■ WODF-1WM	Wall Mounted Outdoor Drinking Fountain		SL	Silver
			G	Green
2.) Options:			〕 R	Red
316-1	316 Stainless Steel Body, Single		BL	Blue
☐ SCV	Seasonal Bowl Cover (1)		0	Orange
) V	Violet
			Y	Yellow
			BR	Brown
			BK	Black
			T BK	Black (Textured)
			BE	Beige
			W	White
			YG	Yellow Green
			LBL	Light Blue
			G T	Graphite (Textured)
			MTW [Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

ADA COMPLIANCE

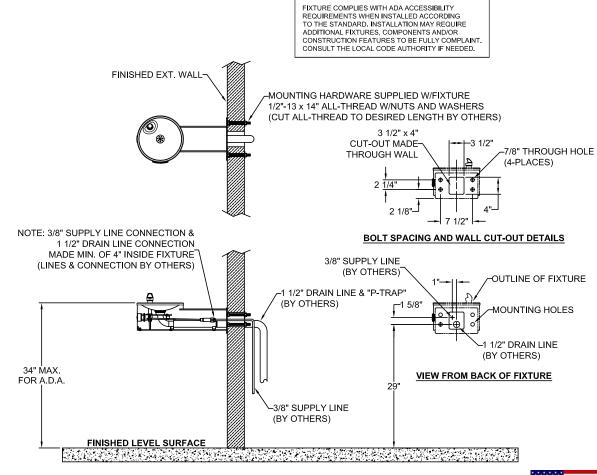

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065




VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.



WOPF-1 Series
Outdoor Pet Drinking Fountain



Recommended Specifications

Willoughby Model **WOPF-1** outdoor pet drinking fountain is a single-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by pedestal mounted solid stainless steel foot-operated push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WOPF-1** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push button
- * Integral slow drain
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WOPF-1 outdoor pet drinking fountain in Orange color Use the following Willoughby Model Number: **WOPF-1-O**



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com


5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


,	Outdoor Drink WOPF-1	ing Fountain Type: Outdoor Pet Drinking Fountain
2.)	Options:	
	316-1	316 Stainless Steel Body, Single
	CAR-10-1	Surface Carrier, Single
		(Including mounting hardware)
	SOV	Shut Off Valve
	SCV	Seasonal Bowl Cover (1)
	WSFMK4	4 Bolt Hole Mounting Kit
		(Not req'd with Carrier option)

3.) Colors (select one):				
☐ SL	Silver			
🔲 G	Green			
🔲 R	Red			
🔲 BL	Blue			
	Orange			
	Violet			
☐ Y	Yellow			
BR	Brown			
BK	Black			
TBK	Black (Textured)			
BE	Beige			
□ W	White			
YG	Yellow Green			
🔲 LBL	Light Blue			
GT	Graphite (Textured)			
■ MTW	Matte White			

Approved For Manufacturing By: _ Date: _ Company: Wall Thickness: _ Wall Type:

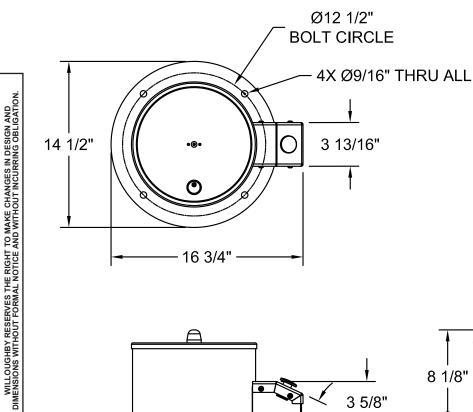





visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268


(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WODF-2WM Series Wall Mounted Two Station Outdoor Drinking Fountain



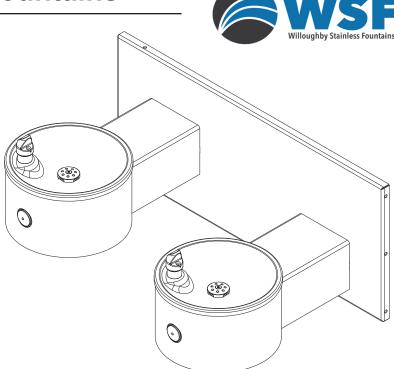

Recommended Specifications

Willoughby Model **WODF-2WM** wall mounted two station outdoor drinking fountain is a dual-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 fountain bodies.

Fountains shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WODF-2WM** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1.

When the fixture is correctly mounted, the respective drinking fountain bowls shall meet American Disabilities Act of 2010 (ADA) compliance requirements (34" max A.F.F. for Adult ADA, 31" max A.F.F. for JR. ADA).

Standard Features

- * Adult ADA and Child (JR.) ADA compliant
- * 5/32" wall thickness stainless steel wall columns
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main columns
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty wall mounting frame
- * Resistant to sunlight, heat, and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-2WM wall mounted two station outdoor drinking fountain in Beige color Use the following Willoughby Model Number: WODF-2WM-BE



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com


5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Drin	king Fountain Type:	3.) Color	s (select one):
■ WODF-2WM	Wall Mounted Two Station	☐ SL	Silver
	Outdoor Drinking Fountain	☐ G	Green
		🔲 R	Red
2.) Options:		🔲 BL	Blue
316-2	316 Stainless Steel Body, Double	 0	Orange
☐ SCV	Seasonal Bowl Covers (2)	□ ∨	Violet
		☐ Y	Yellow
		BR	Brown
		□ BK	Black
		TBK	Black (Textured)
		☐ BE	Beige
		■ W	White
		🔲 YG	Yellow Green
		LBL	Light Blue
		☐ GT	Graphite (Textured)
		☐ MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

FIXTURE COMPLIES WITH ADA ACCESSIBILITY

ADA COMPLIANCE

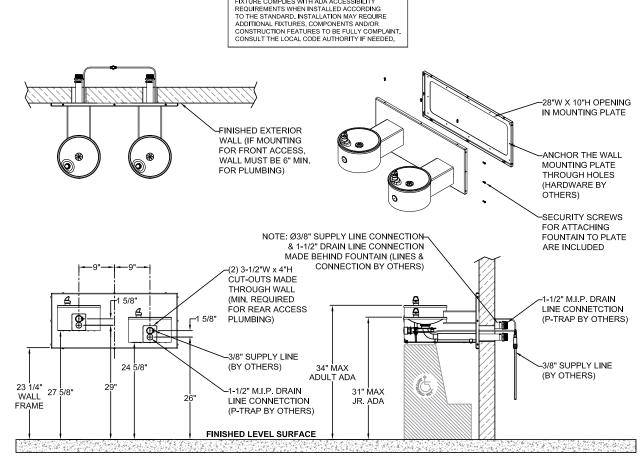

visit our website at www.willoughbystainlessfountains.com
5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

WODF-1-HF-FO Series **Outdoor Hands-Free Drinking Fountain**

Recommended Specifications

Outdoor Hands-Free drinking fountain shall be Willoughby Model No. WODF-1-HF-FO

Willoughby Model WODF-1-HF-FO Hands-Free outdoor drinking fountain is a singlelevel, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have a high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by a solid stainless steel foot operated push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. WODF-1-HF-FO fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9 requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

© Rev. 9/2024

- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA, flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel foot operated push button
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-1-HF-FO outdoor drinking fountain in Silver color Use the following Willoughby Model Number: WODF-1-HF-FO-SL



WARNING: Cancer and Reproductive Harm

www.P65Warnings.ca.gov



5105 West 78th Street • Indianapolis, IN. 46268






1.) Outdoor Drink	ring Fountain Type:	3.) Colors	s (select one):
☐ WODF-1-HF-FO Outdoor Hands-Free Drinking Fountain		☐ SL	Silver
	with Foot Operated Pushbutton	☐ G	Green
		🔲 R	Red
2.) Options:		BL	Blue
316-1	316 Stainless Steel Body, Single		Orange
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	□ ∨	Violet
SOV	Shut Off Valve	☐ Y	Yellow
☐ SCV	Seasonal Bowl Cover (1)	BR	Brown
☐ JF/FW	Jug Filler / Foot Wash	BK	Black
☐ HBE	Hose Bibb Exposed	TBK	Black (Textured)
☐ HBLD	Recessed Hose Bibb w/ Lock Door	□ BE	Beige
☐ HH	Hose / Leash Hanger	\square W	White
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)	YG	Yellow Green
		LBL	Light Blue
		☐ GT	Graphite (Textured)
		■ MTW	Matte White


Approved For Manufacturing By: ______ Date: _____ Company: _____ Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT PORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

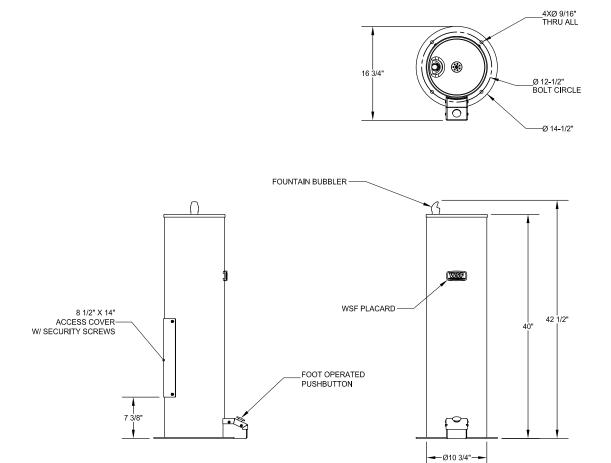

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065



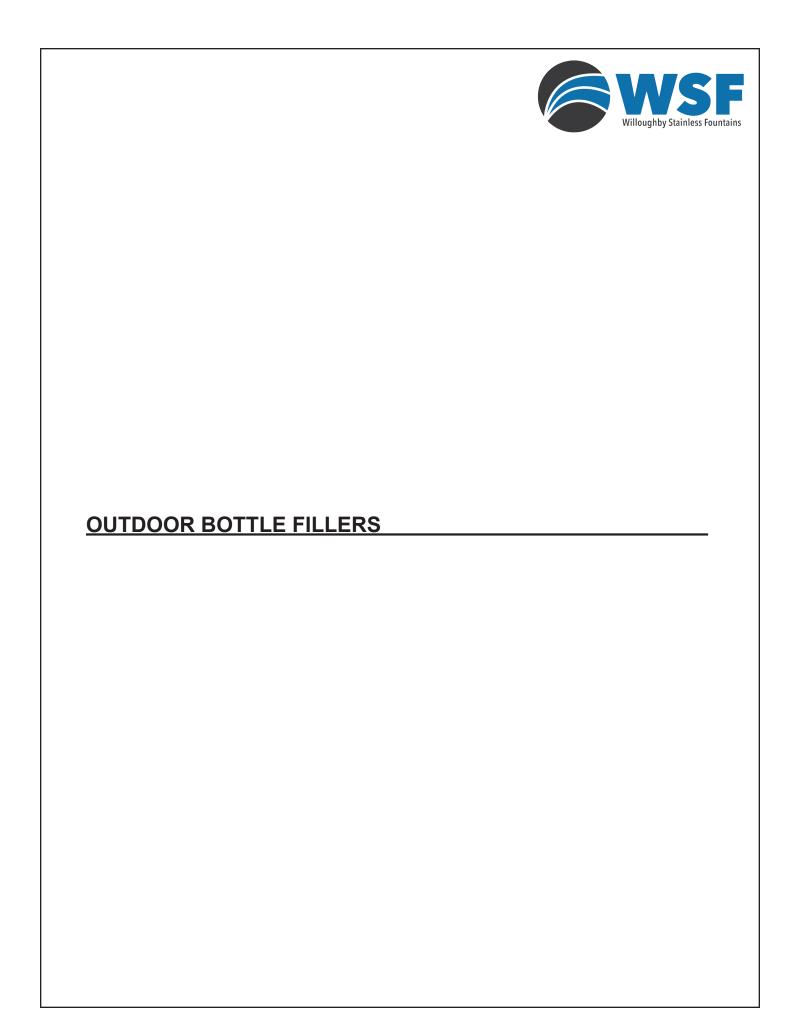



(Page Intentionally Left Blank)

WILLIAM WILLIAM STATES WILLIAM STATES WILLIAM STATES FOUNTAINS

CWBF-1-RPB Series Outdoor Bottle Filler

Recommended Specifications

Outdoor bottle filler shall be Willoughby Model No. CWBF-1-RPB

Model **CWBF-1-RPB** outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force.

Model **CWBF-1-RPB** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Simple, vandal-resistant push button
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-1 outdoor bottle filler with recessed pushbutton, and 316 stainless steel body/cap/flange in Green color,

Use the following Willoughby Model Number: CWBF-1-RPB-316-1 -G



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268



1.) Outdoor B	ottle Filler Type:	3.)	Colors (s	elect one):
☐ CWBF-1-R	PB Outdoor Bottle Filler with		SL	Silver
	Recessed Pushbutton		G	Green
			R	Red
2.) Options:			BL	Blue
316-1	316 Stainless Steel Body, Single		0	Orange
CAR-08-1	Surface Carrier, Single (Including mounting hardware)		V	Violet
☐ JF/FW	Jug Filler / Foot Wash		Υ	Yellow
☐ HBE	Hose Bibb Exposed		BR	Brown
HBLD	Recessed Hose Bibb W/Lock Door		BK	Black
☐ HH	Hose / Leash Hanger		TBK	Black (Textured)
☐ SOV	Shut Off Valve		BE	Beige
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		W	White
			YG	Yellow Green
			LBL	Light Blue
			GT	Graphite (Textured)
			MTW	Matte White

Ø 13"

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

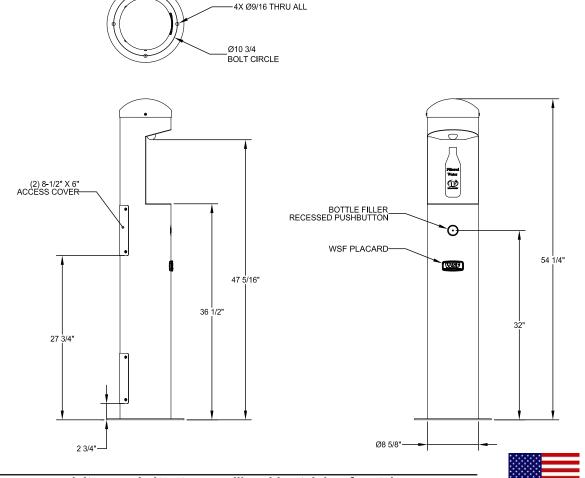

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

visit our website at www.willoughbystainlessfountains.com
5105 West 78th Street ● Indianapolis, IN. 46268



CWBF-2 Series Outdoor Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-2 outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-2-RPB-CHD-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

Outdoor bottle filler with drinking fountain shall be Willoughby Model No. CWBF-2- (see Model Number and Options guide for actuator selection).

Model CWBF-2 outdoor bottle filler with drinking fountain shall be a dual-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with antirotation, anti-squirt, solid stainless steel bubblers.

All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model CWBF-2 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.






CWBF-2-RPB-HC



CWBF-2-RPB-CHD



CWBF-2-RPB-PET


WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268

1.) Outdoor Bot	tle Filler Type:		[Options CONTINUED:]
CWBF-2	1 Outdoor Bottle Filler, and 1 Drinking Fountain	☐ SOV	Shut Off Valve
	Bowl	□ SCV	Seasonal Bowl Cover (1)
		■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)
2.) Bottle Filler	Actuator Options (select one):	■ WSFMK6	6 Bolt Hole Mounting Kit, Used With Pet Bowl Only
☐ RPB	Recessed Push Button		(Not req'd with Carrier option)
□ во	Battery Operated Infrared Sensor		
		5.) Colors (se	elect one):
3.) Drinking Fou	ıntain Bowl Height (select one):	SL	Silver
☐ HC	Adult A.D.A.	□G	Green
☐ CHD	Child	☐ R	Red
□ PET	Pet	☐ BL	Blue
			Orange
4.) Options:		☐ ∨	Violet
316-2	316 Stainless Steel Body, Double	☐ Y	Yellow
☐ CAR-10-1 Su	rface Carrier, Single (Including mounting hardware)	□ BR	Brown
	ırface Carrier, Double, Used With Pet Bowl Only	□ BK	Black
	(Including mounting hardware)	□ TBK	Black (Textured)
□ JF/FW	Jug Filler / Foot Wash	□ BE	Beige
☐ HBE	Hose Bibb Exposed	□ W	White
☐ HBLD	Recessed Hose Bibb W/Lock Door	☐ YG	Yellow Green
□ HH	Hose / Leash Hanger	LBL	Light Blue
		□ GT	Graphite (Textured)
	[CONTINUED IN NEXT COLUMN:]	☐ MTW	Matte White
Approved Fo	or Manufacturing By:	Date:	Company:
1	ess: Wall Type:		Company
Wall HillCKITE	555 vvali Type		

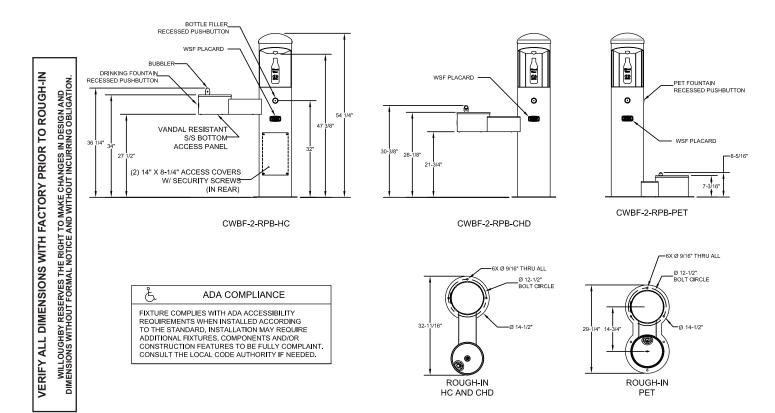





CWBF-3 Series Outdoor Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-3 outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, pet drinking fountain, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-3-RPB-CHD-PET-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

© Rev. 9/2024

Outdoor bottle filler with drinking fountain shall be Willoughby Model No. CWBF-3-___ (see Model Number and Options guide for actuator selection).

Model CWBF-3 outdoor bottle filler with drinking fountain shall be a triple-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with antirotation, anti-squirt, solid stainless steel bubblers.

All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model CWBF-3 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.


Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.




WARNING: Cancer and Reproductive Harm


www.P65Warnings.ca.gov



CWBF-3-HC-SAH




CWBF-3-HC-PET (SIDE PET LOCATION)




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Bott	le Filler Type:		[Options CONTINUED:]
☐ CWBF-3	1 Outdoor Bottle Filler, and 2 Drinking Fountain	■ SOV	Shut Off Valve
	Bowls	☐ SCV	Seasonal Bowl Covers (2)
		☐ WSFMK4	4 Bolt Hole Mounting Kit (Not reg'd with Carrier option)
2.) Bottle Filler	Actuator Options (select one):	☐ WSFMK6	6 Bolt Hole Mounting Kit, Used With Pet Bowl Only
☐ RPB	Recessed Push Button		(Not req'd with Carrier option)
□ во	Battery Operated Infrared Sensor		
		5.) Colors (se	lect one):
3.) Drinking Fou	ntain Bowl Height (select two):	□ SL	Silver
☐ HC	Adult A.D.A.	☐ G	Green
☐ SAH	Standing Adult (38" Rim Height)	□ R	Red
☐ CHD	Child	□ BL	Blue
□ PET	Pet Bowl	□ ○	Orange
	☐ Side ☐ Rear	□ ∨	Violet
		☐ Y	Yellow
4.) Options:		■ BR	Brown
316-3	316 Stainless Steel Body, Triple	□ BK	Black
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	□ TBK	Black (Textured)
☐ CAR-10-2	Surface Carrier, Double, Used With Pet Bowl Only	■ BE	Beige
	(Including mounting hardware)	□ W	White
□ JF/FW	Jug Filler / Foot Wash	☐ YG	Yellow Green
☐ HBE	Hose Bibb Exposed	☐ LBL	Light Blue
☐ HBLD	Recessed Hose Bibb W/Lock Door	□ GT	Graphite (Textured)
□ HH	Hose / Leash Hanger	■ MTW	Matte White
	[CONTINUED IN NEXT COLUMN:]		
Approved F	or Manufacturing By:	Date:	Company:
Wall Thickne	ess: Wall Type:		





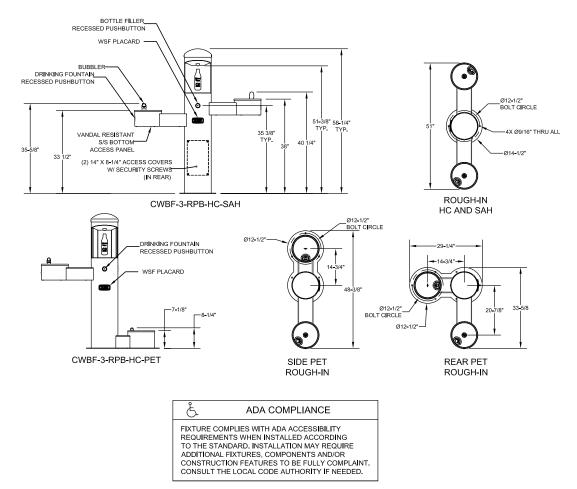

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268

MADE IN THE U.S.A.



CWBF-1WM Series Wall Mounted Outdoor Bottle Filler

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-1WM outdoor bottle filler with recessed pushbutton, and 316 stainless steel body/cap/flange in Green color

Use the following Willoughby Model Number: CWBF-1WM-RPB-316 -G

Standard Features

- * Simple, vandal-resistant pushbutton or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 <u>stainless steel</u> 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)

Recommended Specifications


Wall mounted outdoor bottle filler shall be Willoughby Model No. **CWBF-1WM** ____ (see Model Number and Options guide for actuator selection).


Model **CWBF-1WM** outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve (optional battery operated infrared activation available). Pushbutton operation shall require less than 5 lbs. of force.

Model **CWBF-1WM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.










1.)	Outdoor	Bottle Filler Ty	pe:	4.)	Colors (s	elect one):
	CWBF-1	WM	Outdoor Wall Mounted Single Bottle Filler		SL	Silver
					G	Green
2.)	Actuator	options (selec	t one):		R	Red
	RPB	Recessed Push	Button		BL	Blue
	ВО	Battery Operate	ed Infrared Sensor		0	Orange
					V	Violet
3.)	Options	: :			Υ	Yellow
	316-1	316 Stainless S	teel Body, Single		BR	Brown
	SOV	Shut Off Valve			BK	Black
					TBK	Black (Textured)
					BE	Beige
					W	White
					YG	Yellow Green
					LBL	Light Blue
					GT	Graphite (Textured
					MTW	Matte White


Approved For Manufacturing By: ______ Date: _____ Company: _____ Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.









visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065





CWBF-2WM Series Outdoor Wall Mounted Bottle Filler w/Drinking Fountain


To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-2WM outdoor bottle filler with drinking fountain with recessed pushbutton, and 316 stainless steel body/cap/flange in Blue color

Use the following Willoughby Model Number: CWBF-2WM-RPB-316-2-BL

Standard Features

- * Simple, vandal-resistant pushbutton or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)



Recommended Specifications

Wall mounted outdoor bottle filler shall be Willoughby Model No. CWBF-2WM ____ (see Model Number and Options guide for actuator selection).

Model CWBF-2WM outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve (optional battery operated infrared activation available). Pushbutton operation shall require less than 5 lbs. of force.

Model CWBF-2WM bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.






1.) Outdoor Bottle Filler Type: CWBF-2WM 1 Outdoor Bottle Filler, and 1 Drinking Fountain Bowl 2.) Bottle Filler Actuator Options (select one): RPB Recessed Push Button BO Battery Operated Infrared Sensor 3.) Options: 316-2 316 Stainless Steel Body, Double SOV Shut Off Valve SCV Seasonal Bowl Cover (1)

, (-	
☐ SL	Silver
☐ G	Green
☐ R	Red
□ BL	Blue
	Orange
□ ∨	Violet
☐ Y	Yellow
■ BR	Brown
■ BK	Black
□ TBK	Black (Textured)
■ BE	Beige
□ W	White
☐ YG	Yellow Green
LBL	Light Blue
☐ GT	Graphite (Textured
■ MTW	Matte White

4.) Colors (select one):


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT PORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.





FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

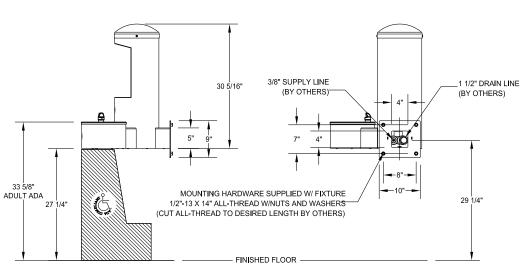

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268





CWBF-3WM Series Outdoor Wall Mounted Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-3WM outdoor bottle filler with drinking fountain with recessed pushbutton, and 316 stainless steel body/cap/flange in Blue color

Use the following Willoughby Model Number: CWBF-3WM-RPB-316-3-BL

Standard Features

- * Simple, vandal-resistant pushbutton or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)

Recommended Specifications


Wall mounted outdoor bottle filler shall be Willoughby Model No. CWBF-3WM ____ (see Model Number and Options guide for actuator selection).

Model CWBF-3WM outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve (optional battery operated infrared activation available). Pushbutton operation shall require less than 5 lbs. of force.

Model CWBF-3WM bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.






1.) Outdoor Bottle Filler Type: ☐ CWBF-3WM 1 Outdoor Bottle Filler, and 2 Drinking Fountain **Bowls** 2.) Bottle Filler Actuator Options (select one): □ RPB Recessed Push Button □ во **Battery Operated Infrared Sensor** 3.) Options: **316-3** 316 Stainless Steel Body, Triple ■ SOV Shut Off Valve ☐ SCV Seasonal Bowl Cover (2)

4.) Colors (select one):
☐ SL	Silver
☐ G	Green
☐ R	Red
□ BL	Blue
	Orange
	Violet
☐ Y	Yellow
BR	Brown
□ BK	Black
■ TBK	Black (Textured)
■ BE	Beige
□ W	White
☐ YG	Yellow Green
LBL	Light Blue
□ GT	Graphite (Textured)
□ MTW	Matte White


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.



ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

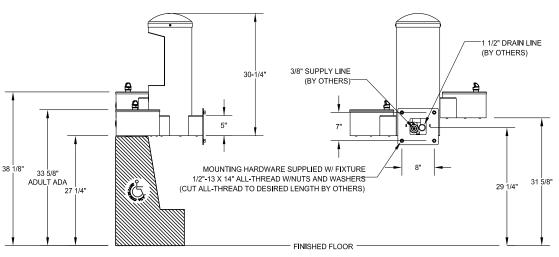

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065





CWBF-1-HF Series Outdoor Hands-Free Bottle Filler

Recommended Specifications

Outdoor Hands-Free bottle filler shall be Willoughby Model No. CWBF-1-HF ____ (see Model Number and Options guide for actuator selection).

Model CWBF-1-HF Hands-Free outdoor bottle filler shall be a single-level, vandal resistant bottle filler with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Filler spout shall be activated by a foot operated solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Foot operated pushbutton operation shall require less than 5 lbs. of force (optional battery operated-infrared activation available).

Model CWBF-1-HF bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Simple, vandal-resistant foot operated push button or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-1-HF outdoor hands-free bottle filler with foot operated pushbutton, and 316 stainless steel body/cap/flange in Green color,

Use the following Willoughby Model Number: CWBF-1-HF-316-1-G



WARNING: Cancer and Reproductive Harm

www.P65Warnings.ca.gov




MADE IN THE U.S.A.

visit our website at www.willoughbystainlessfountains.com

1.) Outdoor	r Bo	ottle Filler Type:	4.)	Colors (s	elect one):
CWBF-1	I-HI	Outdoor Hands-Free Bottle Filler		SL	Silver
				G	Green
2.) Actuato	r o	otions (select one):		R	Red
FO	Fc	ot Operated Pushbutton (standard)		BL	Blue
🔲 во	Ва	attery Operated Infrared Sensor		0	Orange
				V	Violet
3.) Options	s:			Υ	Yellow
316-1		316 Stainless Steel Body, Single		BR	Brown
☐ CAR-08-	-1	Surface Carrier, Single (Including mounting hardware)		BK	Black
JF/FW		Jug Filler / Foot Wash		TBK	Black (Textured)
HBE		Hose Bibb Exposed		BE	Beige
HBLD		Recessed Hose Bibb W/Lock Door		W	White
🔲 НН		Hose / Leash Hanger		YG	Yellow Green
SOV		Shut Off Valve		LBL	Light Blue
■ WSFMK	4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		GT	Graphite (Textured)
				MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

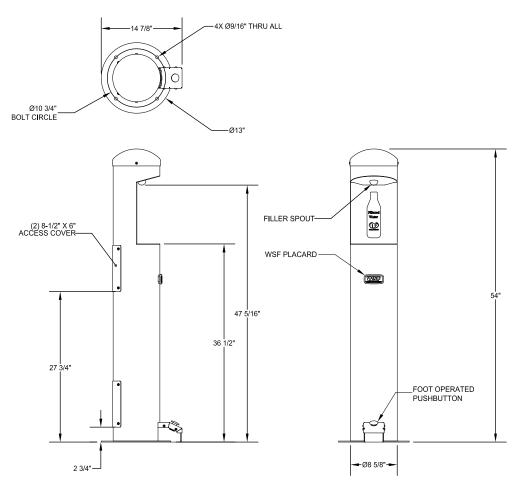

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268



WOBF-1SM Series Stainless Steel Surface Mounted Bottle Filler

Standard Features


Stainless Steel, Surface Mounted, Bottle Filler shall be: Willoughby Model No. **WOBF-1SM**.

Model **WOBF-1SM** bottle filler shall be constructed of a vandal resistant 304 stainless steel, with a removable bottom panel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBF-1SM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by wall mounting frame attached to wall. Anchoring hardware is to be provided by others.

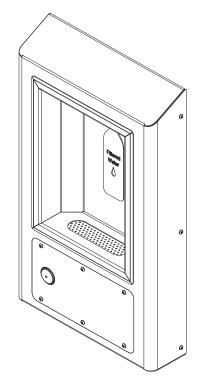


To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBF-1SM surface mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBF-1SM-RPB-SL

Recommended Specifications


- * Simple, vandal-resistant pushbutton
- * Quick, 1-gallon-per-minute fill rate
- * Standard heavy duty type 304 14 Ga. stainless steel
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines (Optional cane skirt avaliable for use in circulation path)
- * Removable bottom panel
- * Powder coat finish (color options on page 2)




MADE IN THE U.S.A.

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Type:			3.) Colors (select one):	
■ WOBF-	1SM-RPB	Stainless Steel, Surface Mounted,	☐ SL	Silver	
		Bottle Filler	☐ G	Green	
2.) Option:			☐ R	Red	
□ CS	Cane Skirt (Re	eqiured when for use in circulation paths)	BL	Blue	
				Orange	
			□ ∨	Violet	
			☐ Y	Yellow	
			BR	Brown	
			□ BK	Black	
			□ TBK	Black (Textured)	
			□ BE	Beige	
			□ W	White	
			YG	Yellow Green	
			LBL	Light Blue	
			☐ GT	Graphite (Textured)	
			■ MTW	Matte White	
Approved	d For Manufact	curing By:	Date:	Company:	
Wall Thic		Wall Type:			



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

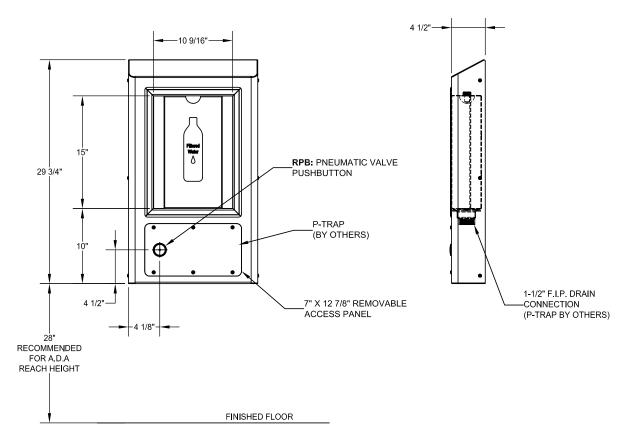

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268





WOBF-1RFM Series Stainless Steel Recessed Front Mounted Bottle Filler

Standard Features


Stainless Steel, Recessed Front Mounted, Bottle Filler shall be: Willoughby Model No. **WOBF-1RFM**.

Model **WOBF-1RFM** bottle filler shall be constructed of a vandal resistant 304 stainless steel, with a removable bottom panel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBF-1RFM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by z-clip at the top of the fixture and internal wall mounting holes at the bottom of the fixture. Anchoring hardware is to be provided by others.

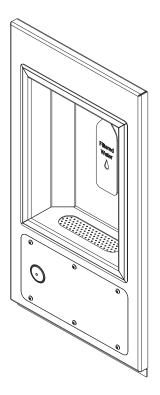


Recommended Specifications Example metering

- * Simple, vandal-resistant pushbutton
- * Quick, 1-gallon-per-minute fill rate
- * Standard heavy duty type 304 14 Ga. stainless steel
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Removable bottom panel
- * Powder coat finish (color options on page 2)

To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBF-1RFM recessed front mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBF-1RFM-RPB-SL






visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

© Rev. 9/2024 WSF2-17

1.) Type: 2.) Colors (select one): ☐ SL ■ WOBF-1RFM-RPB Stainless Steel, Recessed Mounted, Silver **Bottle Filler** □ G Green ☐ R Red ☐ BL Blue Orange ☐ V Violet □ Y Yellow ■ BR Brown □ BK Black □ ТВК Black (Textured) □ BE Beige ■ W White ☐ YG Yellow Green LBL Light Blue □ GT Graphite (Textured) ■ MTW Matte White Approved For Manufacturing By: ___ Date: _ Company:_ Wall Type: Wall Thickness: _

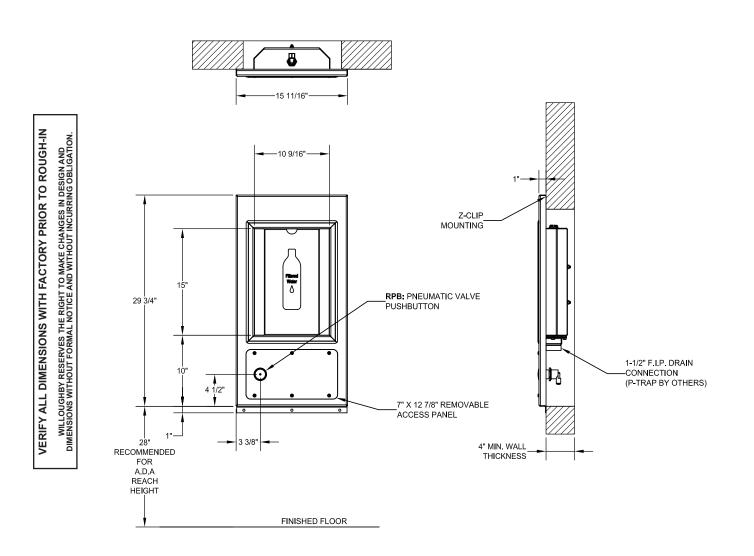

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065





WOBF-1RM Series Stainless Steel Rear Mounted Bottle Filler

Standard Features


Stainless Steel, Rear Mounted, Bottle Filler shall be: Willoughby Model No. **WOBF-1RM**.

Model WOBF-1RM bottle filler shall be constructed of a vandal resistant 304 stainless steel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBF-1RM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by standard 4-point system. \emptyset 1/2" threaded rods, nuts and washers shall be furnished for walls up to 8" thick.

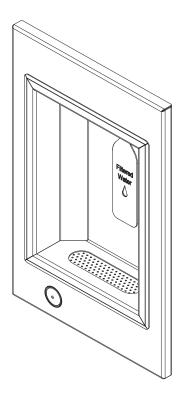


To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBF-1RM rear mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBF-1RM-RPB-SL

Recommended Specifications

- * Simple, vandal-resistant pushbutton
- * Quick, 1-gallon-per-minute fill rate
- * Standard heavy duty type 304 14 Ga. stainless steel
- * Solid <u>stainless steel</u> vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)




MADE IN THE U.S.A.

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Type: 2.) Colors (select one): ■ WOBF-1RM-RPB Stainless Steel, Rear mounted, ☐ SL Silver **Bottle Filler □** G Green ☐ R Red ☐ BL Blue Orange Violet □ Y Yellow ■ BR Brown □ BK Black □ ТВК Black (Textured) □ ВЕ Beige Ū W White YG Yellow Green LBL Light Blue □ GT Graphite (Textured) ■ MTW Matte White Approved For Manufacturing By: ___ Date: _ Company:_

Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

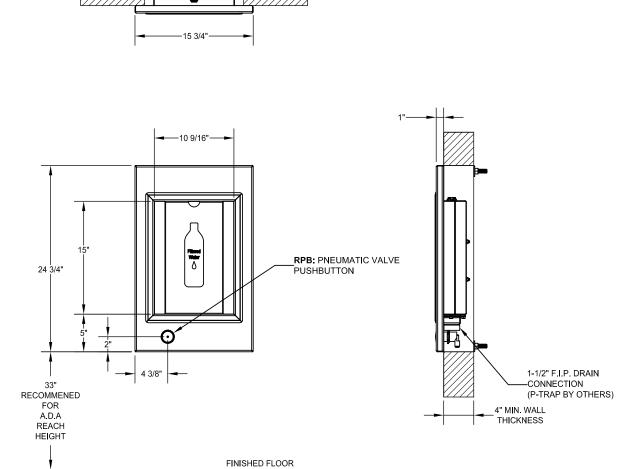


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268



CWBFD-3WM Series Outdoor Wall Mounted Bottle Filler w/Drinking Fountains





To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBFD-3WM outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, pet drinking fountain, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBFD-3WM-RPB-316-3-BL

Recommended Specifications

Outdoor bottle filler with drinking fountains shall be Willoughby Model No. **CWBFD-3WM-**___ (see Model Number and Options guide for actuator selection).

Model **CWBFD-3WM** outdoor bottle filler with drinking fountain shall be a triple-level, vandal resistant wall mounted drinking fountain with 304 stainless steel 14 Ga. wall plate.

Bottle filler spout and fountain bubbler shall be activated by Separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubblers.

All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model **CWBFD-3WM** fountain shall be lead-free, adhering to ANSI/ NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Standard Features

- * Adult A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * Optional marine-grade type 316 <u>stainless steel</u> body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)



WARNING: Cancer and Reproductive Harm


- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

1.) Outdoor Bottle Filler Type:		5.) Colors (select one):
☐ CWBFD-3V	/M 1 Wall Mounted Outdoor Bottle Filler,	☐ SL	Silver
	1 Adult A.D.A. Drinking Fountain Bowl, and	☐ G	Green
	1 Drinking Fountain Bowl	☐ R	Red
		□ BL	Blue
2.) Bottle Fille	r Actuator Options (select one):		Orange
RPB	Recessed Push Button		Violet
□ во	Battery Operated Infrared Sensor	☐ Y	Yellow
		BR	Brown
3.) Options:		□ BK	Black
316-3	316 Stainless Steel Body, Triple	□ TBK	Black (Textured)
☐ SOV	Shut Off Valve	■ BE	Beige
☐ SCV	Seasonal Bowl Covers (2)	□ W	White
		YG	Yellow Green
		LBL	Light Blue
		GT	Graphite (Textured)
		■ MTW	Matte White

Approved For Manufacturing By: ______ Date: _____ Company: _____ Wall Type: _____

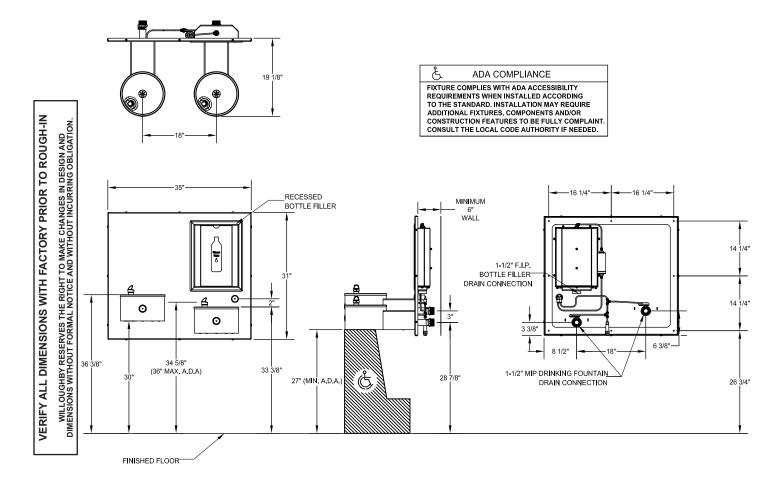





WOBFDF Series
Stainless Steel
ADA Compliant
Rear Mounted
Bottle Filler
w/ Drinking Fountain

Standard Features


Stainless Steel, ADA Compliant, Bottle Filler w/ Drinking Fountain shall be: Willoughby Model No. **WOBFDF**

Model WOBFDF bottle filler shall be constructed of a vandal resistant 304 stainless steel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBFDF** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by standard 6-point system. \emptyset 1/2" threaded rods, nuts and washers shall be furnished for walls up to 8" thick.




To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBFDF rear mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBFDF-SL

Recommended Specifications

- * Adult A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * Solid <u>stainless steel</u> vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * Resistant to sunlight, heat, and vandalism
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)




MADE IN THE U.S.A.


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

© Rev. 9/2024 WSF2-23

1.) Type: 2.)			select one):
■ WOBFDF	Stainless Steel, ADA Compliant, Rear Mounted,	☐ SL	Silver
	Bottle Filler w/ Drinking Fountain	🔲 G	Green
		🔲 R	Red
		□ BL	Blue
			Orange
		□ ∨	Violet
		☐ Y	Yellow
		☐ BR	Brown
		□ BK	Black
		□ TBK	Black (Textured)
		□ BE	Beige
		□ W	White
		☐ YG	Yellow Green
		LBL	Light Blue
		☐ GT	Graphite (Textured)
		☐ MTW	Matte White
Approved Fo	r Manufacturing By:	Date:	Company:

Wall Type:

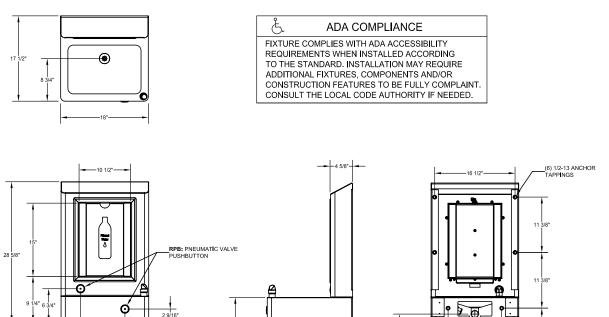

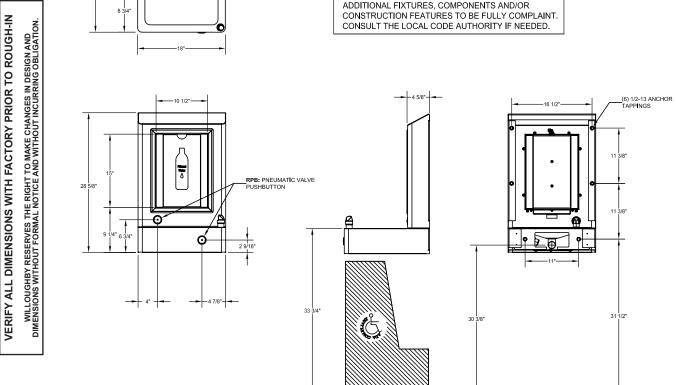



(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

Wall Thickness: _



WOBFDF-FA Series
Stainless Steel
ADA Compliant
Front Mounted
Bottle Filler
w/ Drinking Fountain

Standard Features


Stainless Steel, ADA Compliant, Front Mounted Bottle Filler w/ Drinking Fountain shall be: Willoughby Model No. **WOBFDF-FA**

Model **WOBFDF-FA** bottle filler shall be constructed of vandal resistant 304 stainless steel. With a removable bottom shroud.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBFDF-FA** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by wall mounting frame attached to wall. Anchoring hardware is to be provided by others.




To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBFDF-FA front mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBFDF-FA-SL

Recommended Specifications

- * Adult A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * Resistant to sunlight, heat, and vandalism
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)



MADE IN THE U.S.A.

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Type:

■ WOBFDF-FA

Stainless Steel, ADA Compliant,

Front Mounted, Bottle Filler w/ Drinking Fountain

2.) Colors (select one):

☐ SL Silver

☐ G Green Red

□ BL Blue□ O Orange

☐ V Violet
☐ Y Yellow

☐ Y Yellow☐ BR Brown☐ BK Black

☐ TBK Black (Textured)


□ BE Beige□ W White

☐ YG Yellow Green
☐ LBL Light Blue

Graphite (Textured)

■ MTW Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:	_	. ,







ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT, CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.





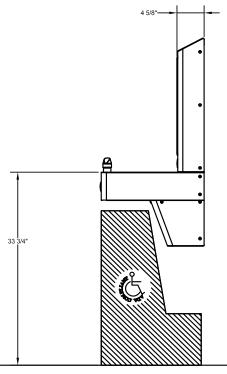

 $visit\ our\ website\ at\ www.willoughby stainless fountains.com$

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065





CWBF-4ADA Series Outdoor Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-4 outdoor bottle filler with drinking fountain with recessed pushbutton, and 316 stainless steel body/cap/flange in Blue color

Use the following Willoughby Model Number: CWBF-4-RPB-316-BL

Standard Features

- * Adult A.D.A. compliant, Adult standing, and Pet bowls
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

Outdoor bottle filler with drinking fountain shall be Willoughby Model No. **CWBF-4ADA-**___ (see Model Number and Options guide for actuator selection).

Model **CWBF-4ADA** outdoor bottle filler with drinking fountain shall be a triple-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubblers.

All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model **CWBF-4ADA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.




MADE IN THE U.S.A.


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Oı	ıtdoor Boti	tle Filler Type:	4.) Colors (s	select one):
☐ CV	VBF-4ADA	1 Outdoor Bottle Filler, and 3 Drinking Fountain	☐ SL	Silver
		Bowls	🔲 G	Green
			☐ R	Red
2.) Bo	ttle Filler A	Actuator Options (select one):	BL	Blue
RF	РВ	Recessed Push Button		Orange
□ BC)	Battery Operated Infrared Sensor	□ ∨	Violet
			☐ Y	Yellow
3.) O	ptions:		BR	Brown
3 1	6-4	316 Stainless Steel Body, Quadruple	BK	Black
☐ CA	AR-10-2	Surface Carrier, Double (Including mounting hardware)	TBK	Black (Textured)
☐ HE	BE	Hose Bibb Exposed	BE	Beige
☐ HE	BLD	Recessed Hose Bibb W/Lock Door	□ W	White
□ S0	OV :	Shut Off Valve	YG	Yellow Green
	CV	Seasonal Bowl Covers (3)	LBL	Light Blue
□ W:	SFMK6	6 Bolt Hole Mounting Kit (Not req'd with Carrier option)	☐ GT	Graphite (Textured)
			■ MTW	Matte White


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		









FIXTURE COMPLIANCE FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.








visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



© Rev. 9/2024

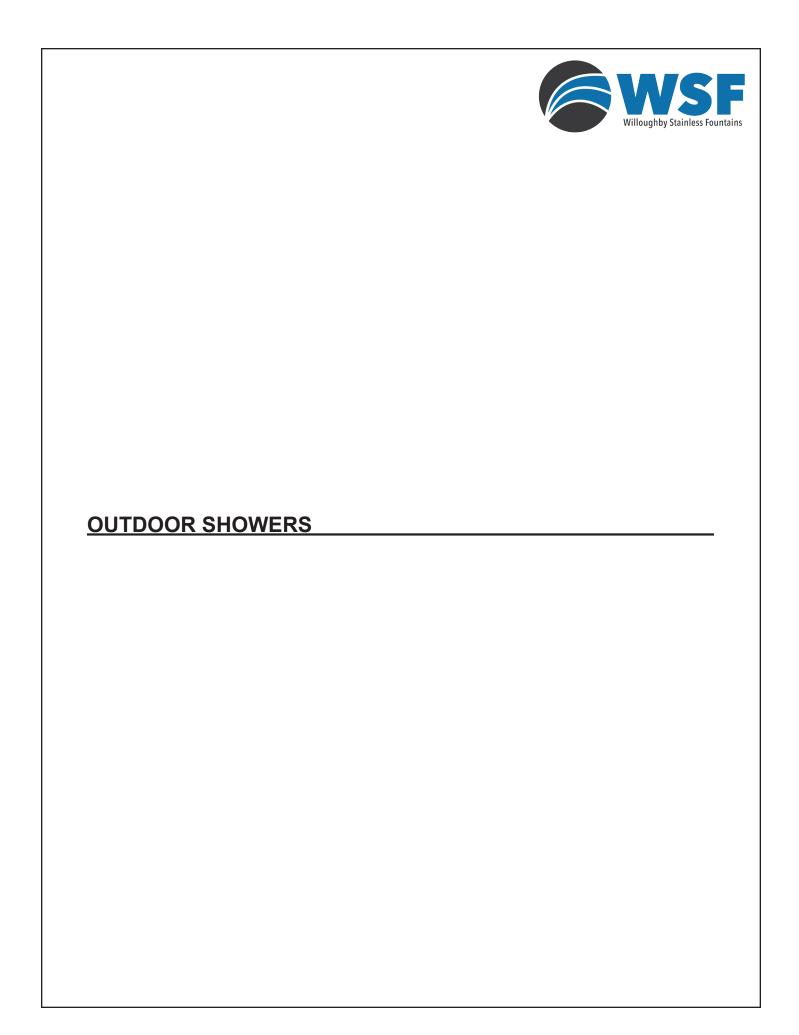



(Page Intentionally Left Blank)

WODS Series Outdoor Shower



Example: To specify a WODS outdoor shower with 4 shower heads, 1 foot shower, 316 stainless steel body / cap / flange, in Violet color

Use the following Willoughby Model Number: WODS-4-1-316-V

1	MODEL NUMBER	SHOWER HEADS	FOOT SHOWERS
	WODS-1-0	1	0
	WODS-1-1	1	1
	WODS-2-0	2	0
	WODS-2-1	2	1
	WODS-2-2	2	2
	WODS-4-0	4	0
	WODS-4-1	4	1
	WODS-4-2	4	2

Recommended Specifications

Outdoor shower shall be Willoughby Model No. **WODS-__-** (select number of shower heads and foot showers from table above).

Model **WODS** outdoor shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Shower heads and foot showers shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free metering and non-metering valves with 1.5 GPM flow. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.


Shower heads and optional foot showers shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Shower unit shall have a powder coat finish from the list of colors on the next page.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.





WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



1.) Outdoor Sho	wer Type:	6.)	Colors	(select one):
■ WODS	Outdoor Shower		SL	Silver
			G	Green
2.) Head Shower	rs:		R	Red
□ 1	One (1) Head Shower		BL	Blue
2	Two (2) Head Showers		0	Orange
4	Four (4) Head Showers		V	Violet
			Υ	Yellow
3.) Foot Shower	s:		BR	Brown
0	No Foot Showers		BK	Black
1	One (1) Foot Shower		BE	Beige
2	Two (2) Foot Showers		W	White
			YG	Yellow Green
4.) Flow Rates:			LBL	Light Blue
■ 1.5 GPM (Sta	ndard)		GT	Graphite (Textured)
			MTW	Matte White
5.) Options:				
☐ 316-ODS	316 Stainless Steel Body For Outdoor Shower			
☐ HBE	Hose Bibb Exposed			
☐ HBLD	Recessed Hose Bibb w/Lock Door			
□ JF	Jug Filler			


Surface Carrier For Outdoor Shower (Including mounting hardware)

-Ø8-5/8"

4 Bolt Hole Mounting Kit (Not req'd with Carrier option)

Ø13"

Approved For Manufacturing By: Date: _ Company: Wall Thickness: Wall Type: 4XØ 9/16" THRU ALL -HOLES ON Ø10¾" BOLT CIRCLE

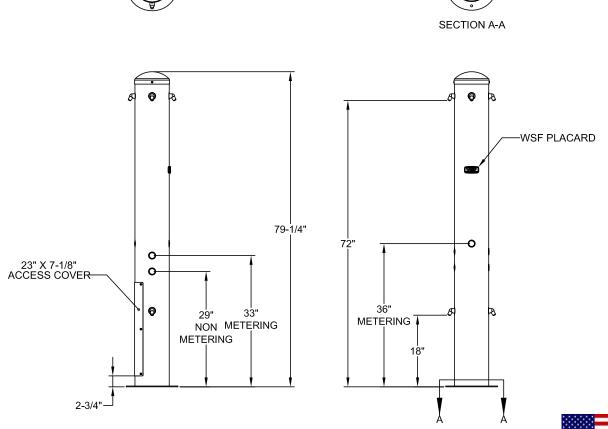

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION

□ CAR-08-1

☐ WSFMK4


WODS-ADA Series ADA Outdoor Shower



To specify fixture and options, use the Model Number and Options page.

Example: To specify a WODS-ADA outdoor shower with one-sided approach, 316 stainless steel body/cap/flange, in Yellow color

Use the following Willoughby Model Number: WODS-ADA-1A-316-Y



Outdoor shower shall be Willoughby Model No. WODS-ADA-___...

Model **WODS-ADA** outdoor shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Meets ADA reach and height requirements with one (1) standard shower head, one (1) shower head at ADA height, one (1) foot shower, two (2) grab bars, and three (3) push buttons for operating showers. Push button for ADA shower head is also at ADA height requirement.

Shower heads and foot showers shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free metering and non-metering valves with 1.5 GPM flow. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.


Shower heads and optional foot showers shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Shower unit shall have a powder coat finish from the list of colors on the next page.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

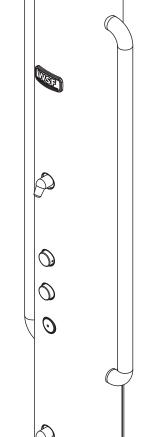



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


© Rev. 7/2023 WSF3-3


1.) Outdo	or Show	ver Type:			6.) Col	ors (select one):			
■ WODS-ADA Outdoor ADA Shower			SL	Silver					
					☐ G	Green			
2.) Appro	ach:				☐ R	Red			
□ 1A	<u>One-si</u>	ded Approach-		showering stations are on the	☐ BL	Blue			
			same side of the shower			Orange			
□ 2A	Two-si	ded Approach*	- ADA and non-ADA show	9	□ ∨	Violet			
			opposite sides of the sh	ower column	☐ Y	Yellow			
****					BR	Brown			
*NOTE:			will be placed on the sa	ime side as	BK	Black			
	tne no	n-ADA showe	r nead.		BE	Beige			
3.) Foot S	hower				☐ W	White			
□ 0	nowers	No Foot Show	vore		YG	Yellow Green	1		
1 1		One (1) Foot			LBL	Light Blue			
<u> </u>		Two (2) Foot S			☐ GT	Graphite (Tex	ctured)		
– 2		1W0 (2) 1 001 (Siloweis		☐ MT\	V Matte White			
4.) Flow F	Rates:								
☐ 1.5 GF		dard)							
_		,							
5.) Option	ıs:								
316-0	DS	316 Stainless	Steel Body For Outdoor S	Shower					
CAR-0	8-1	Surface Carrie	er For Outdoor Shower (In	cluding mounting hardware)					
□ JF		Jug Filler							
HBE		Hose Bibb Ex	posed						
HBLD		Recessed Hos	se Bibb W/Lock Door						
☐ WSFM	IK4	4 Bolt Hole Me	ounting Kit (Not req'd with	Carrier option)					
Λ		\ / =	union au Davi	·	Deter		C	·	
1	Approved For Manufacturing By:				Date:		Company:		-
I Wall T	hickne	ess:		Wall Type:					



ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.



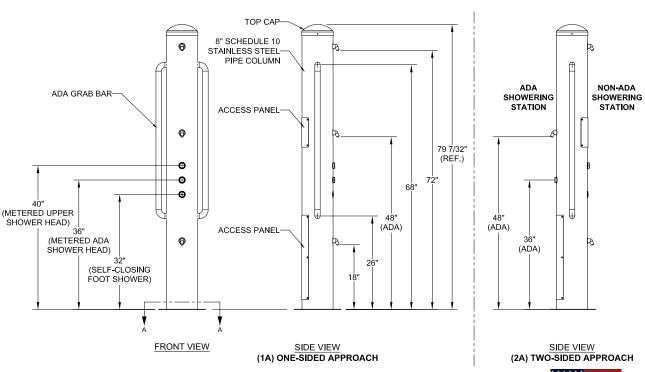

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

WODFS Series Outdoor Foot Shower



To specify fixture and options, use the Model Number and Options page.

Example: To specify a WODFS outdoor foot shower with 2 foot shower heads, 1.0 GPM flow rate, 316 stainless steel body/cap/flange, in Silver color

Use the following Willoughby Model Number: WODFS-2-1.0-316-ODS-SL

Recommended Specifications

Outdoor Foot Shower shall be:
Willoughby Model No. **WODFS-__...**(Select from model number and options list on next page)

Model **WODFS** outdoor foot shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Foot shower head(s) shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free non-metering valves. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.


Foot shower head(s) shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Shower unit shall have a powder coat finish from the list of colors on page 2.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

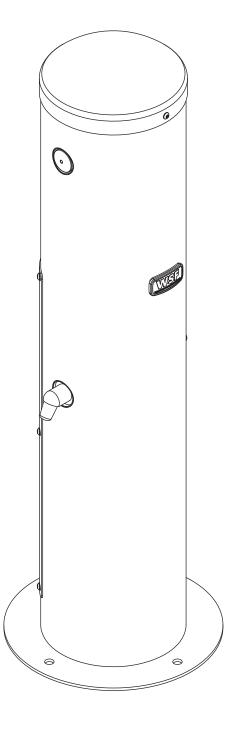



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




1.) Outdoor Show	ver Type:	5.)	Colors	(select one):
■ WODFS	Outdoor Foot Shower		SL	Silver
			G	Green
2.) Foot Showers	s:		R	Red
□ 1	Single (1) Foot Shower Head		BL	Blue
2	Dual (2) Foot Shower Heads		0	Orange
			V	Violet
3.) Flow Rates:			Υ	Yellow
■ 1.0 GPM (Star	ndard)		BR	Brown
			BK	Black
4.) Options:			BE	Beige
☐ 316-ODS	316 Stainless Steel Body For Outdoor Shower		W	White
☐ HBE	Hose Bibb Exposed		YG	Yellow Green
☐ HBLD	Recessed Hose Bibb w/Lock Door		LBL	Light Blue
□ JF	Jug Filler		GT	Graphite (Textured)
□ CAR-08-1	Surface Carrier For Outdoor Shower (Including mounting hardware	e) 🔲	MTW	Matte White
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)			

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

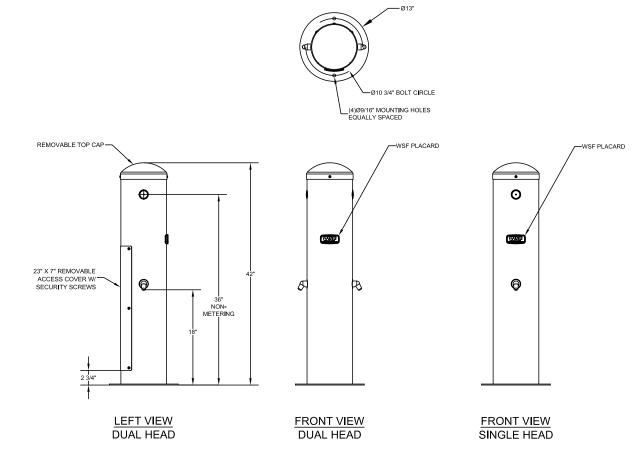

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065




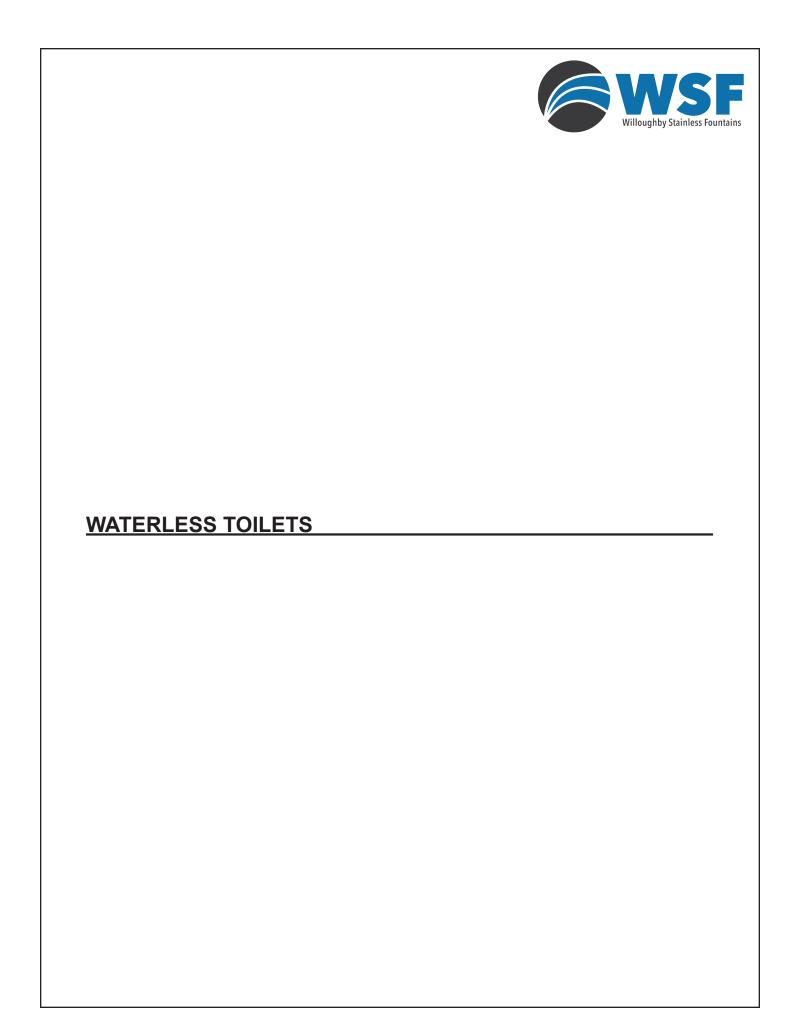



(Page Intentionally Left Blank)

WT-2016 Waterless Toilet

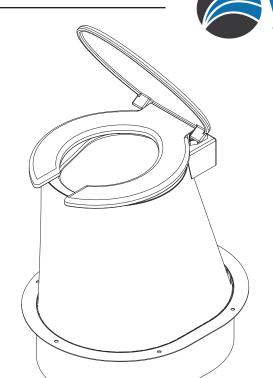



Recommended Specifications

Waterless toilet shall be Willoughby Model No. WT-2016.

This unit is designed for use in parks, campgrounds, farms and wilderness areas where traditional waste systems are not available. Unit is designed for installation over vented pits. Fixture body shall be fabricated from 18 gauge type 304 stainless steel. Below floor extension is fabricated from 24 gauge type 304 stainless steel.

To specify fixture and options, use the Model Number and Options page. $\label{eq:continuous}$

Example: To specify a WT-2016 unit with a white hinged plastic seat:
Use the following Willoughby Model Number: WT-2016-HS

The construction shall be spot welded with exposed stainless surfaces polished to a #4 finish.

Waterless toilet shall include: 18 gauge stainless steel seat with piano hinge and 1 1/2" wide floor flange with 3/8" anchor holes. Anchoring hardware by others.






1.) Options:


☐ HS Hinged White Plastic Seat

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

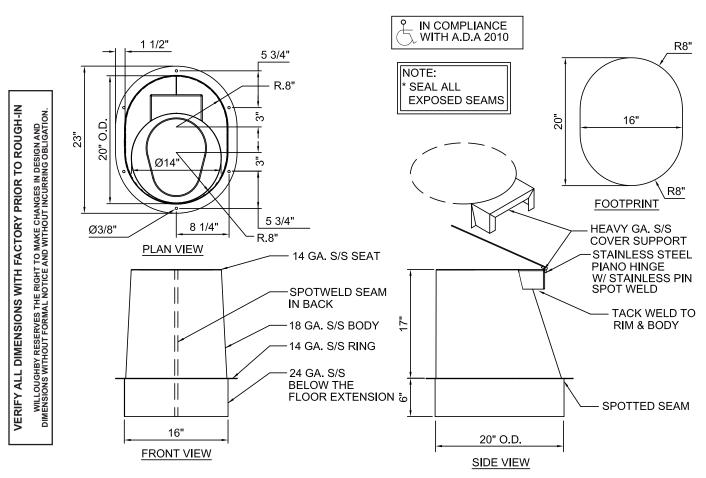

visit our website at www.willoughbystainlessfountains.com
5105 West 78th Street ● Indianapolis, IN. 46268




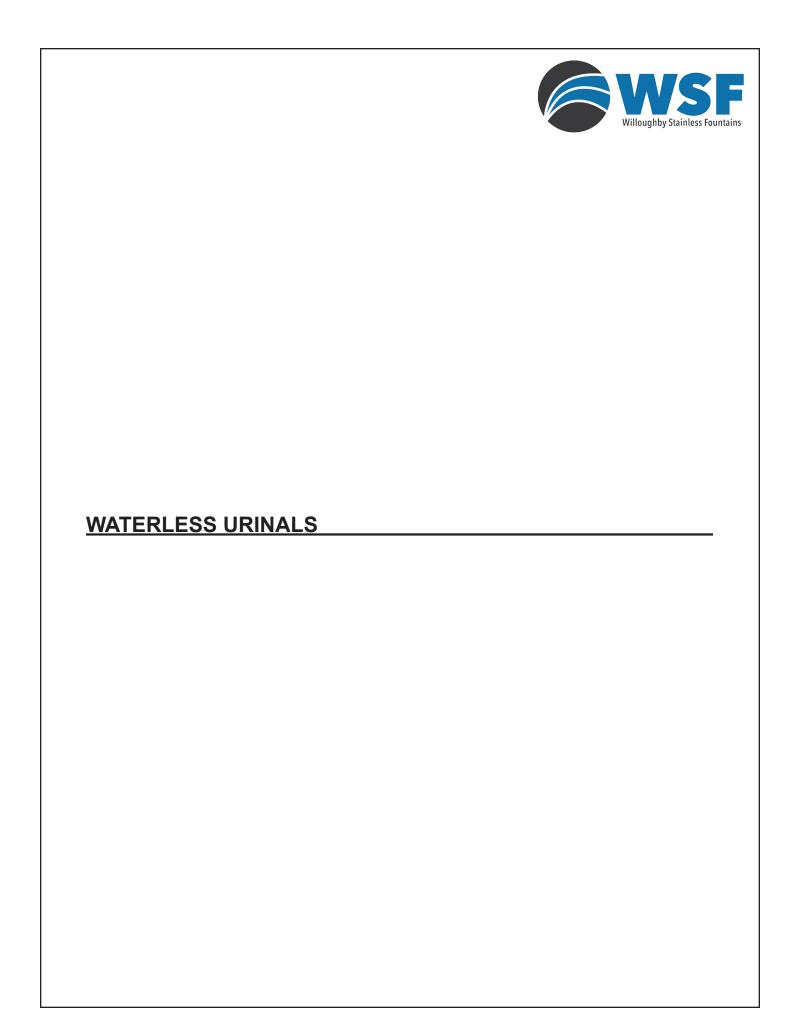



(Page Intentionally Left Blank)

WU-1010 Single Person Waterless Trough Urinal

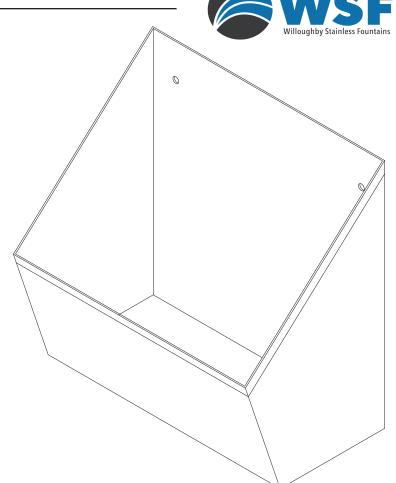

Recommended Specifications

Single Person Waterless Trough Urinal shall be: Willoughby Model No. **WU-1010** (Select from model number and options list on next page)

Fixture is fabricated from 16 GA., Type 304 stainless steel. The construction shall be all-welded with exposed stainless surfaces polished to a #3 satin finish.

Standard equipment shall include:

- Strainer with 1-1/2" M.P.T. pipe nipple

Anchoring shall be from the front, anchoring holes provided. Anchor hardware by others.


Unit requires no chase area for installation and maintenance.

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Single Person Waterless Trough Urinal

Use the following Willoughby Model Number:

WII-1010






1.) Base Model Number:


☐ WU-1010 Single Person Waterless Trough Urinal


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

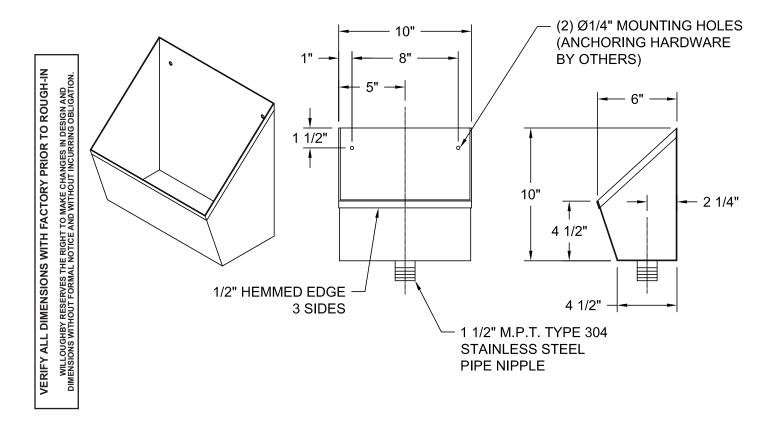







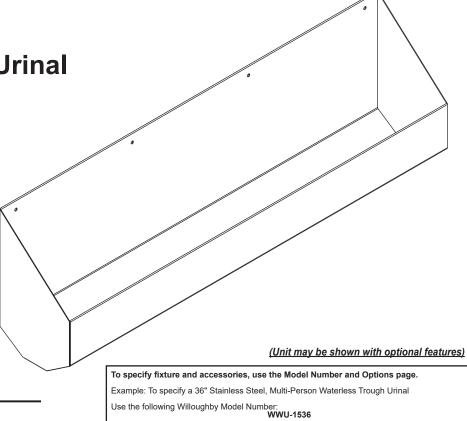

Recommended Specifications

Stainless Steel, Multi-Person Waterless Trough Urinal shall be: Willoughby Model No. **WWU-15___** (Select from model number and options list on next page)

Fixture is fabricated from 14 GA., Type 304 stainless steel. The construction shall be all-welded with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:

- Beehive strainer with Ø1-1/2", 2" long tailpiece

Anchoring shall be from the front, anchoring holes provided. Anchor hardware by others.


Unit requires no chase area for installation and maintenance.

WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov



1.) Base Model Number: ☐ WWU-1536 36" Stainless Steel, Multi-Person, Waterless Trough Urinal ■ WWU-1548 48" Stainless Steel, Multi-Person, Waterless " 60" Stainless Steel, Multi-Person, Waterless " ■ WWU-1560 ☐ WWU-1572 72" Stainless Steel, Multi-Person, Waterless " ■ WWU-1596 96" Stainless Steel, Multi-Person, Waterless " 2.) Options: ☐ BKSPL36 36" x 36" 14 GA. Stainless Steel Backsplash ■ BKSPL48 36" x 48" 14 GA. " 36" x 60" 14 GA. " ☐ BKSPL60 36" x 72" 14 GA. " ☐ BKSPL72 ☐ BKSPL96 36" x 96" 14 GA. " Other Other

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

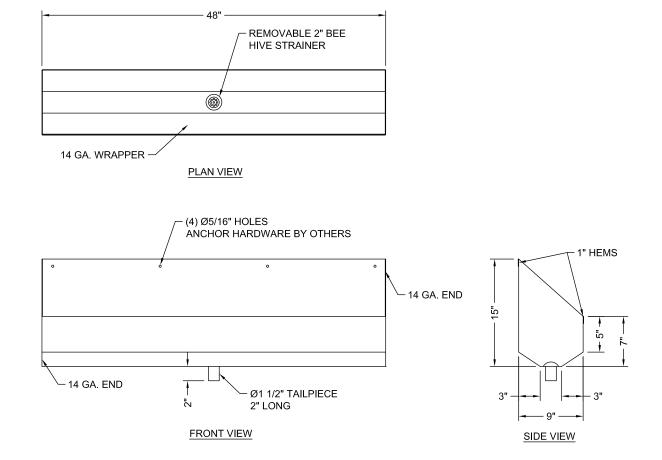


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

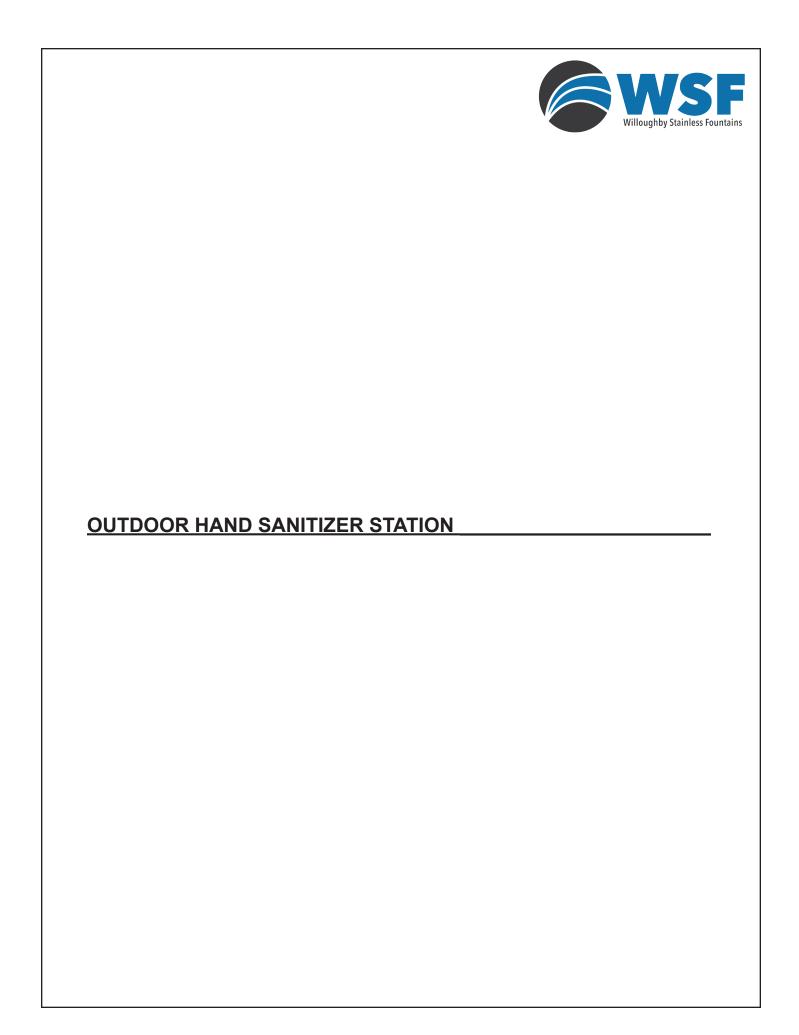



(Page Intentionally Left Blank)

WOHS Hand Sanitizer Station





To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOHS-1 Single Hand Sanitizer Station in Silver color Use the following Willoughby Model Number: WOHS-1-SL

Recommended Specifications

Willoughby Model **WOHS-_** Hand Sanitizer Station is a vandal resistant Hand Sanitizer Station with Type 304 stainless steel 4-1/2" Schedule-40 main column and 7 GA. flange. Protective hinged sanitizer dispenser box is fabricated from 14 GA. stainless steel. A keyed lock in the top allows for easy access for sanitizer cartridge replacement.


Fixture uses industry standard and commercially available replacement cartridge.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

© Rev. 9/2024

- * Heavy duty Type 304 stainless steel 4-1/2" Schedule-40 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * Resistant to sunlight, heat, and vandalism
- * Hinged 14ga. sanitizer dispenser box
- * Powder coat finish (color options on page 2)
- * Unit is shipped with one cartridge of hand sanitizer







1.) Hand Sanitizer Station Type:

☐ WOHS-1 Single Hand Sanitizer Station

■ WOHS-2 Dual Hand Sanitizer Station

2.) Colors (select one):

- ☐ SL Silver
- G Green
- Red
- □ BL Blue□ O Orange
- ☐ V Violet
- Yellow
- BR Brown
- BK Black
- TBK Black (Textured)
- □ BE Beige
- W White
- ☐ YG Yellow Green
- LBL Light Blue
- ☐ GT Graphite (Textured)
- MTW Matte White

3.) Options:


☐ 316-1 316 Stainless Steel Body

☐ WSFMK4 4 Bolt Hole Mounting Kit

4 Bolt Hole Mounting Kit (Not req'd with Carrier option) Surface Carrier, Single (Including mounting hardware)

☐ CAR-04-1 Surface Carrier, Single (Including mounting hardw

Approved For Manufacturing By: ______ Date: _____ Company: _____ Wall Thickness: _____ Wall Type: _____

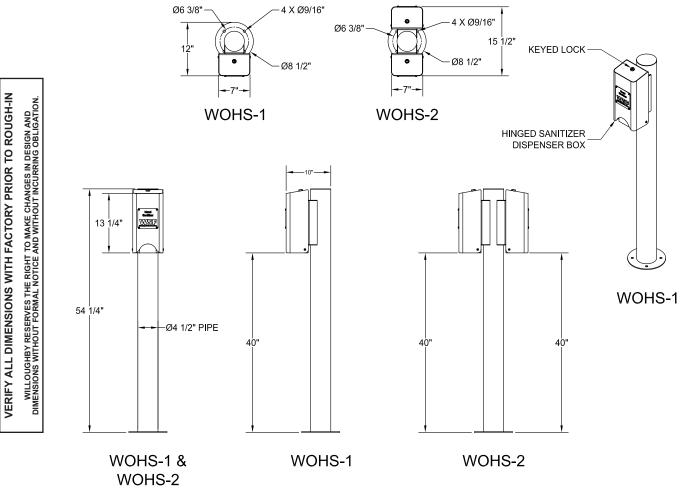


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268



WOHS-WM Wall mounted Hand Sanitizer Station





To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOHS-WM Wall Mounted Hand Sanitizer Station in Silver color Use the following Willoughby Model Number: WOHS-WM-SL

Recommended Specifications

Willoughby Model **WOHS-WM** Wall Mounted Hand Sanitizer Station is a vandal resistant Hand Sanitizer Station with protective hinged sanitizer dispenser box is fabricated from 14 GA. stainless steel. A keyed lock in the top allows for easy access for sanitizer cartridge replacement. Mounting hardware by others.

Fixture uses industry standard and commercially available replacement cartridge.

Standard Features

- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * Resistant to sunlight, heat, and vandalism
- * Hinged 14ga. sanitizer dispenser box
- * Powder coat finish (color options on page 2)
- * Unit is shipped with one cartridge of hand sanitizer





1.) Hand Sanitizer Station Type:

■ WOHS-WM Wall Mounted, Hand Sanitizer Station

2.) Colors (select one):

☐ SL Silver

□ G Green

☐ R Red

☐ BL Blue Orange

□ ∨ Violet

□ Y Yellow

BR Brown

🔲 ВК Black

■ TBK Black (Textured)

BE Beige

■ W White

☐ YG Yellow Green LBL Light Blue

☐ GT

Graphite (Textured)


Matte White ■ MTW


3.) Options:


316-1 316 Stainless Steel Body


Company: Approved For Manufacturing By: _ Date: _ Wall Thickness: _ Wall Type:

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION








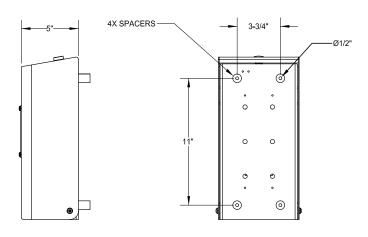

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

MADE IN THE U.S.A.

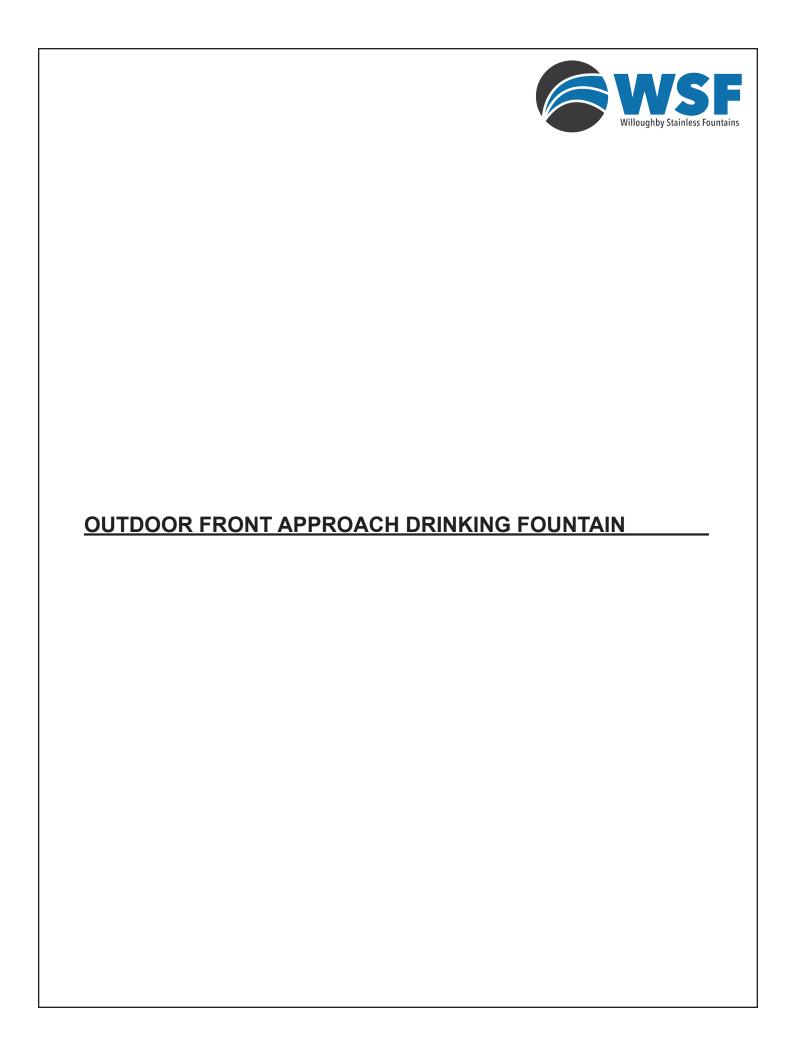



(Page Intentionally Left Blank)

WSF Willoughby Stainless Fountains

WODF-2FA Series Outdoor Drinking Fountain Front Approach

Recommended Specifications

Willoughby Model **WODF-2FA** outdoor drinking fountain, front approach is a dual-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. **WODF-2FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

WODF-2FA-HC


Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-2FA outdoor drinking fountain with Child-height (JR. ADA) bowl, in Green color

Use the following Willoughby Model Number: WODF-2FA-CHD-G



WODF-2FA-CHD



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov





visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Drinking Fountain Type:		4.) Colors (select one):		
■ WODF-2FA	Two-bowl Outdoor Drinking Fountain, Front Approach	☐ SL	Silver	
		🔲 G	Green	
2.) Bowl Height (other than main column bowl):		☐ R	Red	
☐ HC	Adult ADA Compliant	□ BL	Blue	
☐ CHD	Child (JR. ADA Compliant)		Orange	
			Violet	
3.) Options:		☐ Y	Yellow	
316-2	316 Stainless Steel Body, Double	BR	Brown	
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	BK	Black	
☐ SOV	Shut Off Valve	🔲 ТВК	Black (Textured)	
☐ SCV	Seasonal Bowl Covers (2)	□ BE	Beige	
☐ JF/FW	Jug Filler / Foot Wash	□ W	White	
☐ HBE	Hose Bibb Exposed	YG	Yellow Green	
HBLD	Recessed Hose Bibb w/ Lock Door	LBL	Light Blue	
□ HH	Hose / Leash Hanger	☐ GT	Graphite (Textured)	
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)	■ MTW	Matte White	

Approved For Manufacturing By: _ Date: _ Company: Wall Thickness: . Wall Type:





WODF-2-HC


WODF-2-CHD



ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

Note: Access panel is on back side of unit.




WODF-2-HC & WODF-2-CHD



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

WODF-3FA Series Outdoor Drinking Fountain Front Approach





WODF-3FA-HC-CHD


Recommended Specifications

Willoughby Model **WODF-3FA** outdoor drinking fountain, front approach is a triple-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. **WODF-3FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.




Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA, flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-3FA outdoor drinking fountain with Adult ADA and Child-height (JR. ADA) bowls, in Red color

Use the following Willoughby Model Number: WODF-3FA-HC-CHD-R



WODF-3FA-CHD-PET (REAR PET LOCATION)



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov





visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


1.) Outdoor Drinking Fountain Type:		4.) Colors (select one):		
■ WODF-3FA	Three-bowl Outdoor Drinking Fountain, Front Approach	SL	Silver	
		🔲 G	Green	
☐ HC ☐ CHD	ther than main column bowl, select two): Adult ADA Compliant Child (JR. ADA Compliant)	☐ R ☐ BL ☐ O	Red Blue Orange	
☐ PET	Pet Bowl ☐ Side ☐ Rear	□ ∨ □ Y	Violet Yellow	
3.) Options:		🔲 BR	Brown	
316-3	316 Stainless Steel Body, Triple	□ BK	Black	
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	☐ TBK	Black (Textured)	
☐ CAR-10-2	Surface Carrier, Double, Used With Pet Bowl Only (Including mounting hardware)	☐ BE ☐ W	Beige White	
□ SOV □ SCV	Shut Off Valve Seasonal Bowl Covers (3)	☐ YG	Yellow Green	
☐ JF/FW	Jug Filler / Foot Wash	LBL	Light Blue	
☐ HBE	Hose Bibb Exposed	☐ GT	Graphite (Textured)	
☐ HBLD	Recessed Hose Bibb W/Lock Door Hose / Leash Hanger	☐ MTW	Matte White	
☐ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)			
☐ WSFMK6	6 Bolt Hole Mounting Kit, Used With Pet Bowl Only (Not req'd with Carrier option)			
Approved For Manufacturing By:		Date:	Company:	
I Wall Thickness	Wall Type:			

Wall Thickness: vvali Type:







WODF-3FA-HC-PET



Note: Access panel is on back side of unit.



WODF-3FA-HC-PET & WODF-3FA-CHD-PET (SIDE PET LOCATION)



ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.




(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

© Rev. 9/2024

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

> visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268

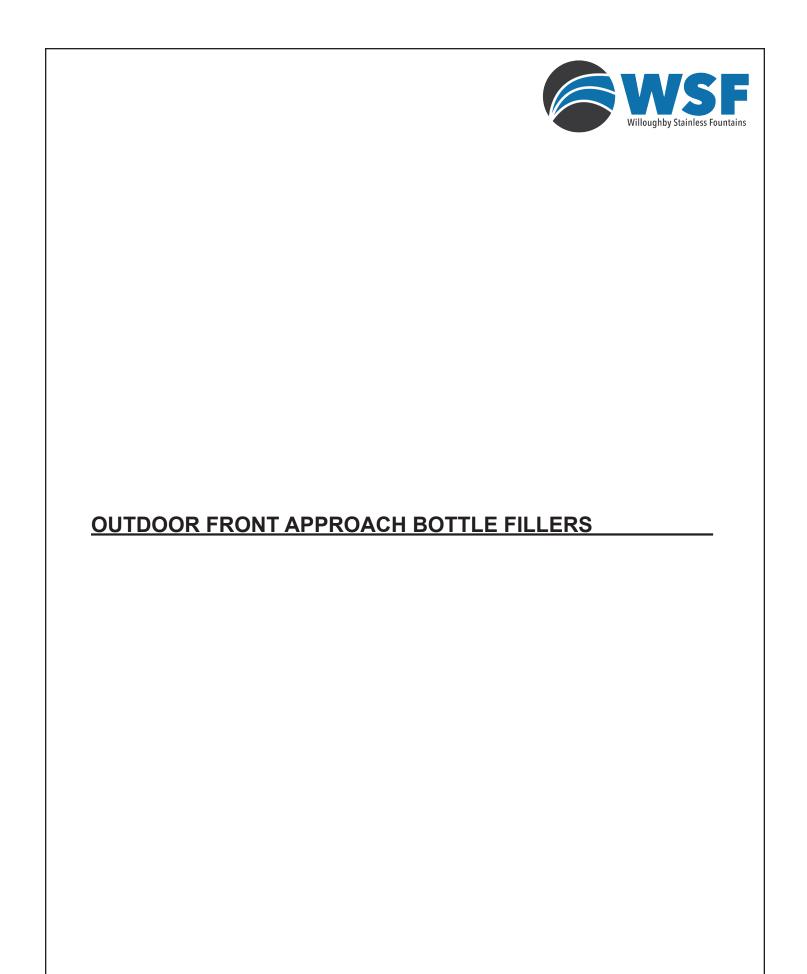



(Page Intentionally Left Blank)



CWBF-2FA Series Outdoor Bottle Filler Front Approach w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-2FA outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-2FA-RPB-CHD-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel, anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)



CWBF-2FA-RPB-HC

Recommended Specifications

Outdoor bottle filler, front approach, with drinking fountain shall be Willoughby Model No. **CWBF-2FA-** (see Model Number and Options guide for actuator selection).

Model **CWBF-2FA** outdoor bottle filler, front approach, with drinking fountain shall be a dual-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with antirotation, anti-squirt, solid stainless steel bubblers.


All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model **CWBF-2FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



CWBF-2FA-RPB-CHD



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Outdoor Bottle Filler Type:

☐ CWBF-2FA 1 Outdoor Bottle Filler, Front Approach,

and 1 Drinking Fountain Bowl

2.) Bottle Filler Actuator Options (select one):

☐ RPB Recessed Push Button

■ BO Battery Operated Infrared Sensor

3.) Drinking Fountain Bowl Height (select one):

☐ HC Adult A.D.A.☐ CHD Child

4.) Options:

316-2 316 Stainless Steel Body, Double

□ CAR-10-1 Surface Carrier, Single (Including mounting hardware)

□ JF/FW Jug Filler / Foot Wash□ HBE Hose Bibb Exposed

☐ HBLD Recessed Hose Bibb W/Lock Door

☐ HH Hose / Leash Hanger☐ SOV Shut Off Valve


☐ SCV Seasonal Bowl Cover (1)

■ WSFMK4 4 Bolt Hole Mounting Kit (Not req'd with Carrier option)

5.) Colors (select one):

- ☐ SL Silver
- ☐ G Green ☐ R Red
- BL Blue
- Orange
- □ V Violet□ Y Yellow
- ☐ BR Brown
- □ BK Black□ TBK Black (Textured)
- ☐ BE Beige
- ☐ W White
- ☐ YG Yellow Green ☐ LBL Light Blue
- ☐ GT Graphite (Textured)
- MTW Matte White


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		· •

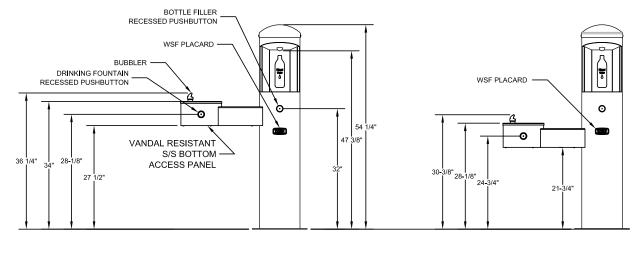

CWBF-2-RPB-HC

CWBF-2-RPB-CHD

Note: Access panel is on back side of unit.



Ł

ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION



CWBF-3FA Series Outdoor Bottle Filler Front Approach w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-3FA outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, pet drinking fountain, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-3FA-RPB-CHD-PET-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel, anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

Outdoor bottle filler, front approach, with drinking fountain shall be Willoughby Model No. **CWBF-3FA-**____ (see Model Number and Options guide for actuator selection).

Model **CWBF-3FA** outdoor bottle filler, front approach, with drinking fountain shall be a triple-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubblers.


All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.


Model **CWBF-3FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



CWBF-3FA-HC-SAH



CWBF-3FA-CHD-PET (REAR PET LOCATION)

WARNING: Cancer and Reproductive Harm


- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Bottle Filler Type:			Options CONTINUED:		
☐ CWBF-3FA	1 Outdoor Bottle Filler, Front Approach,	☐ SOV	Shut Off Valve		
	and 2 Drinking Fountain Bowls	☐ SCV	Seasonal Bowl Covers (2)		
		■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		
2.) Bottle Filler Actuator Options (select one):		■ WSFMK6	6 Bolt Hole Mounting Kit , Used With Pet Bowl Only		
■ RPB	Recessed Push Button		(Not req'd with Carrier option)		
□ во	Battery Operated Infrared Sensor				
		5.) Colors (se	lect one):		
3.) Drinking Fountain Bowl Height (select two):		☐ SL	Silver		
☐ HC	Adult A.D.A.	G G	Green		
☐ SAH	Standing Adult (38" Rim Height)	☐ R	Red		
□ CHD	Child	□ BL	Blue		
□ PET	Pet Bowl	 0	Orange		
	☐ Side ☐ Rear	□ ∨	Violet		
		☐ Y	Yellow		
4.) Options:		■ BR	Brown		
316-3	316 Stainless Steel Body, Triple	□ BK	Black		
□ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	□ TBK	Black (Textured)		
□ CAR-10-2	Surface Carrier, Double , Used With Pet Bowl Only	■ BE	Beige		
	(Including mounting hardware)	■ W	White		
☐ JF/FW	Jug Filler / Foot Wash	YG	Yellow Green		
☐ HBE	Hose Bibb Exposed	□ LBL	Light Blue		
☐ HBLD	Recessed Hose Bibb W/Lock Door	□ GT	Graphite (Textured)		
□ HH	Hose / Leash Hanger	■ MTW	Matte White		
	[CONTINUED IN NEXT COLUMN:]				
Approved For Manufacturing By: Date: Company:					
Wall Thickness: Wall Type:					

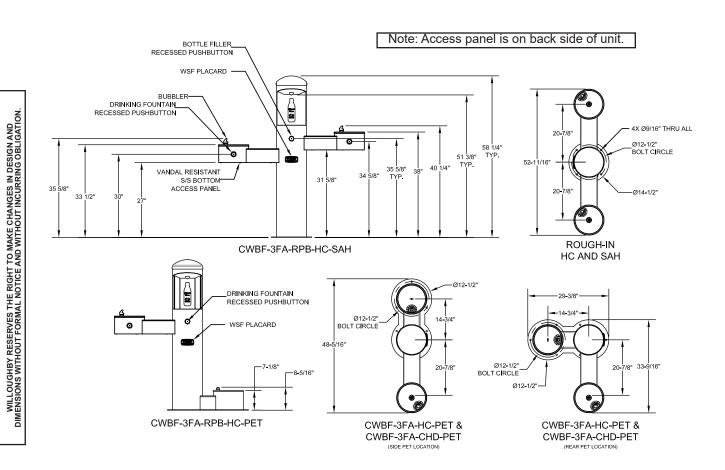

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN